



CATALOGUE



DBK®
Products
Catalog

Shenzhen DBK Electronics Co., Ltd.

Add: Building A&B, Liyuan Industrial Park, Huarong Road, Dalang Street,
Longhua District, Shenzhen 518109, China

Tel: +86-755-61861886

Fax: +86-755-61886160

Email: marketing@dbk.com.cn

Web: <http://www.dbk.com.hk>

DBK-MKT-EPO-PB-20190101



SHENZHEN DBK ELECTRONICS CO., LTD.

www.dbk.com.hk

Company Profile

Shenzhen DBK Electronics Co., Ltd. is a leading ODM/OEM manufacturer offering one-stop solution from battery cell, ID design, R&D, manufacturing to finished consumer electronics for main brands all over the world. Products categories include power bank, energy storage, wireless charger, adapter, car charger and smart products, etc.

DBK owns one head office and two manufacturing factories in the Pearl River Delta region of Guangdong, which covers an area of over 200,000 square meters, with more than 3,000 employees.



Enterprise Qualifications




Memberships



USB-IF

Products Certificates

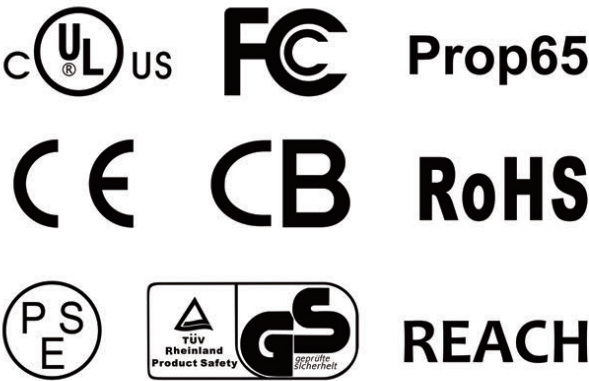

Index

Power Bank	1
Power Station	49
Wireless Charger	59
HUB	73
Adapter	85
Car Charger	97
Smart Product	103

Power Bank

Power Bank

<http://www.dbk.com.hk>

*Excellent Quality



*20100mAh High Capacity



MacBook
1.5 times



iPhone 8
6.5 times



iPad Mini 4
2.4 times



Nintendo Switch
2.8 times



Galaxy S8
4 times

*Compact and Light Design



AS-329TP

20,100mAh

- 45W Fast Charge USB-C Port: With PD 2.0 USB Type-C port, this portable charger supports 45W Power Delivery fast charging for iPhone X/10, 8/8Plus, the Macbook 2015-2017, Nintendo Switch and more; Fully recharging time is reduced to 3-4 hours due to Power Delivery 2.0 input (45W). (It could charge iPhone X 8/8 Plus up to 50% within half an hour and Nintendo Switch fully within 3 hours).
- Supporting QC2.0 Technology: With Quick Charge 2.0 Technology, it allows compatible devices to charge 75% faster, supporting fast charging Samsung S8, S7/S7 Edge, Note 8, Google Pixel XL/ Pixel 2 XL, Nexus 5X / 6P and other normal USB devices.
- High Capacity with Compact and Light Design: It could charges iPhone 8 6.5 times, iPad Mini 4 2.4 times, New Macbook 1.5 times, Nintendo Switch 2.8 times and Galaxy S8 4 times with 20100mAh capacity. it is travel-friendly in the similar size with iPhone 8 plus.
- Multiple Smart Protection System: We design it according to UL2056 testing standard, keep your devices safe from over-charging, over-voltage, over-current and short circuit.

45W Type C PD Powerbank



Model: AS-329TP
Capacity: 20100mAh/74.37Wh
Battery Type: Li-ion Battery 18650
Input: Micro USB 5V/3A 9V/2A 12V/1.5A
Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
USBA 5V/2.4A 9V/2A 12V/1.5A
Housing material: Plastic
Size: 162*78.5*22.5mm
Weight: 372g



Model: AS-334TP
Capacity: 20100mAh/74.37Wh
Battery Type: Li-ion Battery 18650
Input: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
USBA 5V/2.4A 9V/2A 12V/1.5A
Housing material: Plastic
Size: 162*78.5*22.5mm
Weight: 372g




Model: AS-333TP
Capacity: 20100mAh/74.37Wh
Battery Type: Li-ion Battery 18650
Input: Micro USB 5V/3A 9V/2A 12V/1.5A
Type C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
USBA 5V/2.4A 9V/2A 12V/1.5A
Housing material: Plastic
Size: 162*78.5*22.5mm
Weight: 372g




Model: AS-330TP
Capacity: 20100mAh/74.37Wh
Battery Type: Li-ion Battery 18650
Input: Micro USB 5V/3A 9V/2A 12V/1.5A
Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
Output: Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
USBA 5V/2.4A 9V/2A 12V/1.5A
Housing material: Plastic
Size: 162*78.5*22.5mm
Weight: 385g


*Excellent Quality

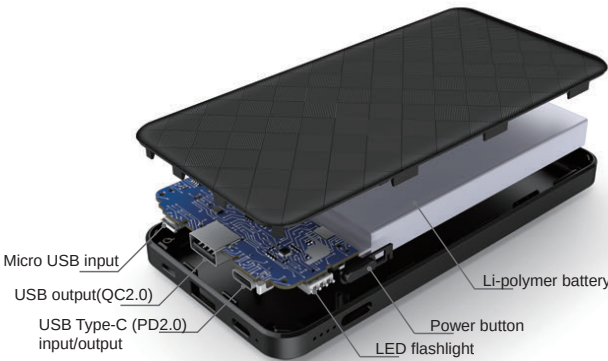

*10000mAh High Capacity

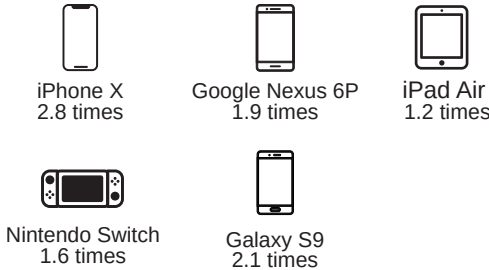

*Compact and Light Design

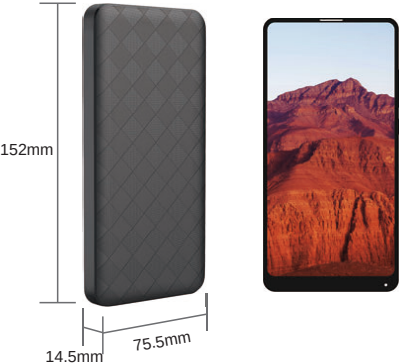

AS-332TP
10,000mAh

- 18W Fast Charge USB-C Port: With PD 2.0 USB Type-C port, this portable charger supports 18W Power Delivery fast charging for iPhone X/10, 8/8Plus Nitendo Switch and more.
- Supporting QC2.0 Technology: With Quick Charge 2.0 Technology, it allows compatible devices to charge 75% faster, supporting fast charging Samsung S8, S7/S7 Edge, Note 8, Google Pixel XL/ Pixel 2 XL, Nexus 5X / 6P and other normal USB devices.
- Compact and Light Design with High Capacity: 10000mAh of power changes iPhone X 2.8times,Galaxy S9 2.1times,Goo- gle Nexus 6P 1.9times, Nintendo Switch 1.6times,iPad Air 1.2times. It is lighter than normal power banks that is portable and good for travelling.
- Multiple Smart Protection System: We design it according to UL2056 testing standard, keep your devices safe from over-charging, over-voltage, over-current and short circuit.

18W Type C PD Powerbank



Model: AS-332TP
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/3A 9V/2A 12V/1.5A
Type-C 5V/3A 9V/2A 12V/1.5A 15V/1.2A
Output: Type-C 5V/3A 9V 2A 12V/1.5A 15V/1.2A
USBA 5V/2.4A 9V/2A 12V/1.5A
Total 18W
Housing material: Plastic
Size: 152*75.5*14.5mm
Weight: 248g



Model: AS-332TP-H
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input:Type-C 5V/3A 9V/2A 12V/1.5A 15V/1.2A
Output: Type-C 5V/3A 9V 2A 12V/1.5A 15V/1.2A
USBA 5V/2.4A 9V/2A 12V/1.5A
Total 18W
Housing material: Plastic
Size: 152*75.5*14.5mm
Weight: 248g



Model: AS-463TP
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input:Type C 5V/3A 9V/2A 12V/1.5A 15V/1.2A
Output: Type-C 5V/3A 9V 2A 12V/1.5A 15V/1.2A
2*USBA 5V/2.4A 9V/2A 12V/1.5A
Total 18W
Housing material: Plastic
Size: 152*75.5*14.5mm
Weight: 248g



Model: MS-063TP
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/3A 9V/2A 12V/1.5A
Type-C 5V/3A 9V/2A 12V/1.5A 15V/1.2A
Output: Type-C 5V/3A 9V 2A 12V/1.5A 15V/1.2A
USBA 5V/2.4A 9V/2A 12V/1.5A
Total 18W
Housing material: Metal
Size: 152*75.5*14.5mm
Weight: 248g
Remark: Exclusive for Amazon.com and Middle East Market



Model: AS-331TP
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/3A 9V/2A 12V/1.5A
Type-C 5V/3A 9V/2A 12V/1.5A 15V/1.2A
Output: Type-C 5V/3A 9V 2A 12V/1.5A 15V/1.2A
USBA 5V/2.4A 9V/2A 12V/1.5A
Total 18W
Housing material: Plastic
Size: 152*75.5*14.5mm
Weight: 248g
Remark: Exclusive for Amazon.com and Middle East Market

Digital LED display & Type-C PD

AS-256TP
20,000mAh

- **Model:** AS-256TP
 - **Capacity:** 20,000mAh/74Wh
 - **Battery Type:** Li-polymer battery
 - **Input:** Type-C 5V/3A 9V/3A 12V/2.5A 15V/2A 30W Max
 - **Output:** Type-C 5V/3A 9V/3A 12V/2.5A 15V/2A 30W Max
USB*3 5V/2.4A
Total 42W
 - **Dimension:** 163*75*25mm
- Remark: Exclusive for Amazon.com



AS-249TP
30,000mAh

- **Model:** AS-249TP
 - **Capacity:** 30,000mAh/111Wh
 - **Battery Type:** Li-polymer battery
 - **Input:** Type-C 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
 - **Output:** Type-C PD2.0 5V/3A 9V/3A 12V/3A 15V/3A 20V/2.25A
USB*2 5V 3A, 9V 2A, 12V 1.5A
Total 45W
 - **Dimension:** 175*87*30mm
 - **Weight:** 485g
- Remark: Exclusive for Amazon.com





Model: AS-6700
Capacity: 6,700mAh/24.79Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2.1A
Output: USB-A 5V/2.4A
Dimension: 93.6*48.6*23mm
Weight: 142g



Model: AS-10050
Capacity: 10,050mAh/37.18Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2.1A
Output: 2* USB-A 5V/2.4A
Dimension: 98.6*63.6*25mm
Weight: 203g



Model: AS-402TC
Capacity: 10,050mAh/36.48Wh
Battery Type: i-ion battery 18650
Input: Type-C 5V/3A
Output: USB-A 5V/2.4A Type-C 5V/3A
Dimension: 98.6*63.6*25mm
Weight: 194.5g



Model: AS-12000
Capacity: 12,000mAh/45Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2.1A
Output: USB-A1 5V/1.3A USB-A2 5V/2.1A
Dimension: 109*73.6*25mm
Weight: 264



Model: AS-16750
Capacity: 16,750mAh/61.97Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2.1A
Output: 2* USB-A 5V/2.4A
Dimension: 128.6*74*25mm
Weight: : 312g



Model: AS-24000Q3
Capacity: 26,800mAh/99.16Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2A 9V/2A 12V/1.5A
Output: USB1 5-6V/3A 6-9V/2A 9-12V/1.5A
USB2/3/4 5V/3.1A
Total DC output 33.5W
Power Indicator: Digital LED display
Dimension: 120*74*40mm
Weight: 483g




Model: AS-24000TP
Capacity: 26,800mAh/99.16Wh
Battery Type: Li-ion battery 18650
Input: USB -C 5V-20V 45W Max
Output: USB-C 5V-20V 45W Max
USB1/2/3/4 5V 2.4A per port , (15W Total)
Total DC output 60W
Power Indicator: Digital LED display
Dimension: 120*74*40mm
Weight: 483g



Model: MS-005TC
Capacity: 5,000mAh/18.5Wh
Battery Type: Li-ion battery 26650
Input: Type-C 5V/2A
Output: Type-C 5V/2.4A
Dimension: 100*34*31mm
Weight: 126g




Model: MS-002TC
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Type-C 5V/3A 9V/2A 12V/1.5A 15V/1.2A
Output: Type-C 5V/3A 9V/2A 12V/1.5A 15V/1.2A
 USB-A 5V/2.4A 9V/2A 12V/1.5A
 Total 18W
Dimension: 145*74*15 mm
Weight: 198g

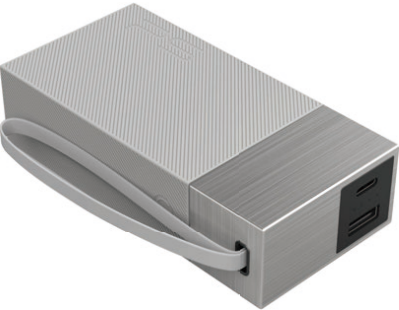


Model: MS-004TC
Capacity: 6,700mAh/24.79Wh
Battery Type: Li-ion battery 18650
Input: Type-C 5V/3A
Output: Type-C 5V/3A USB-A 5V/2.4A
 Total 15W
Dimension: 94*49*25mm
Weight: 148g



Model: MS-003TC
Capacity: 20,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Type-C 5V/3A 9V/3A 12V/2.5A 15V/2A 30W Max
Output: Type C 5V/3A 9V/3A 12V/2.5A 15V/2A 30W Max
 USB-A 5V/2.4A 9V/2A 12V/1.5A
 DC output total 30W
Dimension: 165*74*18 mm
Weight: 415g

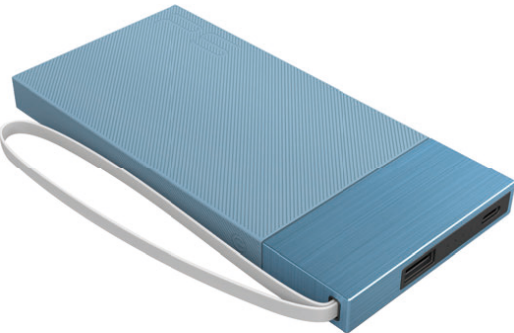

Model: MS-001TC
Capacity: 5,000mAh/17.50Wh
Battery Type: Li-polymer battery
Input: Type-C 5V/3A
Output: Type-C 5V/3A USB-A 5V/2.4A
 Total 15W
Dimension: 142*68*11 mm
Weight: 138g

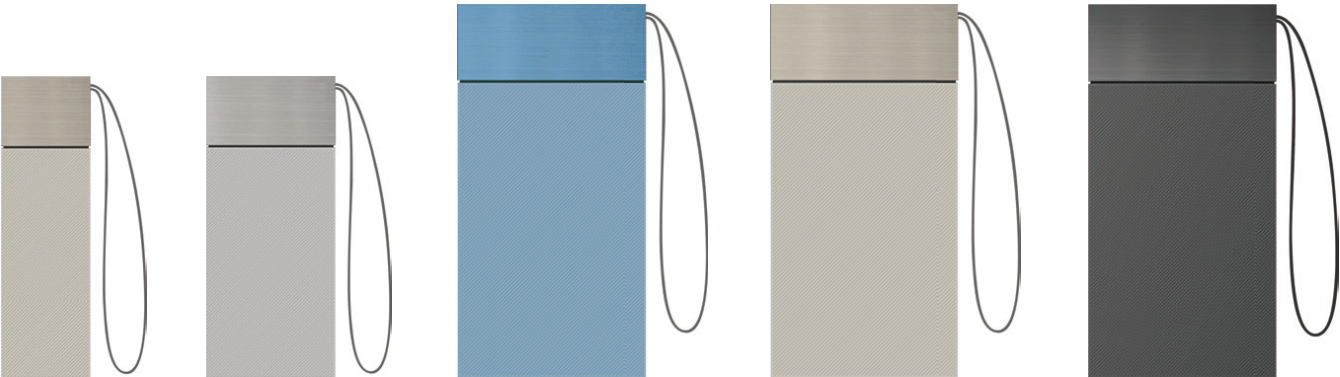

-

-

-

-

Digital LED display

AS-461
5,000mAh

- **Model:** AS-461
- **Capacity:** 5,000mAh/18.50Wh
- **Battery Type:** Li-polymer battery
- **Input:** Type-C 5V/3A
- **Output:** Type-C 5V/3A USBA 5V/2.4A
Total 15W
- **Power Indicator:** Digital LED Display
- **Dimension:** 130*66*11 mm
- **Weight:** 148g
- **Remark:** Exclusive for Japan market



Digital LED display

AS-257TC
10,050mAh

- **Model:** AS-257TC
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Type-C 5V/3A, Micro USB 5V/2.1A
- **Output:** Type-C 5V/3A USBA 5V/2.4A
Total 15W
- **Power Indicator:** Digital LED Display
- **Dimension:** 114*63*22 mm
- **Weight:** 239g



AS-462
10,000mAh

- **Model:** AS-462
- **Capacity:** 10,000mAh/37Wh
- **Battery Type:** Li-polymer battery
- **Input:** Type-C 5V/3A
- **Output:** Type-C 5V/3A USBA 5V/2.4A
Total 15W
- **Power Indicator:** Digital LED Display
- **Dimension:** 151*74*13.9 mm
- **Weight:** 248g
- **Remark:** Exclusive for Japan market



AS-258TC
20,100mAh

- **Model:** AS-258TC
- **Capacity:** 20,100mAh/74.37Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Type-C 5V/3A, Micro USB 5V/2.1A
- **Output:** Type-C 5V/3A USBA*2 5V/2.4A each port
Total 15W
- **Power Indicator:** Digital LED Display
- **Dimension:** 158*81*22 mm
- **Weight:** 463g



AS-359TC
10,050mAh

- **Model:** AS-359TC
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** Type-C 5V/3A
- **Output:** Type-C 5V/3A USB-A*2 5V/2.4A each port
Total 15W
- **Power Indicator:** 4 LED
- **Dimension:** 102*70.5*23.5 mm
- **Weight:** 225g



AS-411TC
10,050mAh

- **Model:** AS-411TC
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** Type C 5V 3A
- **Output:** Type C 5V 3A USB-A*2 5V 2.4A each port
Total 15W
- **Power Indicator:** 4 LED
- **Dimension:** 102 × 70.5× 23.5 mm
- **Weight:** 225g



AS-360TC
20,100mAh

- **Model:** AS-360TC
- **Capacity:** 20,100mAh/74.37Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** Type-C 5V/3A
- **Output:** Type-C 5V/3A USB-A*2 5V/2.4A each port
Total 15W
- **Power Indicator:** 4 LED
- **Dimension:** 168*70.5*23.5mm
- **Weight:** 463g



AS-413TC
20,100mAh

- **Model:** AS-413TC
- **Capacity:** 20,100mAh/74.37Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** Type-C 5V/3A
- **Output:** Type-C 5V/3A USB-A*2 5V/2.4A each port
Total 15W
- **Power Indicator:** 4 LED
- **Dimension:** 168*70.5*23.5mm
- **Weight:** 463g



AS-359
10,000mAh

- **Model:** AS-359
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** Micro USB 5V/2.1A
- **Output:** USBA*2 5V/2.4A each port
Total 12W
- **Power Indicator:** 4 LED
- **Dimension:** 102*70.5*23.5 mm
- **Weight:** 225g



AS-360
20,100mAh

- **Model:** AS-360
- **Capacity:** 20,100mAh/74.37Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** Micro USB 5V/2.1A
- **Output:** USBA*2 5V/2.4A each port
Total 12W
- **Power Indicator:** 4 LED
- **Dimension:** 168*70.5*23.5mm
- **Weight:** 463g



Model: AS-288
Capacity: 2,500mAh/9.25Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/1A
Output: USBA*1 5V/1A
Power Indicator: 4 LED
Dimension: 100*62*8mm
Weight: 63g



Model: AS-289
Capacity: 5,000mAh/18.50Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V 2.1A
Output: USBA*1 5V 2.4A
Power Indicator: 4 LED
Dimension: 120*64*12mm
Weight: 148g



Model: AS-290
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USBA*2 5V/2.4A each port
Total 12W
Power Indicator: 4 LED
Dimension: 142*74*14.9mm
Weight: 238g



Model: AS-291
Capacity: 20,000mAh/74Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USBA*2 5V/2.4A each port
Total 12W
Power Indicator: 4 LED
Dimension: 165*83*21.5mm
Weight: 438g



Model: AS-295
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USBA*2 5V/2.4A each port
Total 12W
Power Indicator: 4 LED
Dimension: 120*64*21mm
Weight: 242g



Power Bank

Carbon Texture

AS-289

5,000mAh

- **Model:** AS-289 (AS-466)
- **Capacity:** 5,000mAh/18.50Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2.1A
- **Output:** USB-A*1 5V/2.4A
- **Power Indicator:** 4 LED
- **Dimension:** 120*64*12mm
- **Weight:** 148g
- **Remark:** Exclusive for Japan market



Model: AS-281
Capacity: 2,500mAh/9.25Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/1A
Output: USB-A*1 5V/1A
Power Indicator: 4 LED
Dimension: 100*62*8mm
Weight: 63g



Model: AS-282
Capacity: 5,000mAh/18.50Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USB-A*1 5V/2.4A
Power Indicator: 4 LED
Dimension: 140*72*9mm
Weight: 148g



Model: AS-283
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USB-A*2 5V/2.4A each port
Total 12W
Power Indicator: 4 LED
Dimension: 160*80*12mm
Weight: 238g



Model: AS-284
Capacity: 20,000mAh/74Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USB-A*2 5V/2.4A each port
Total 12W
Power Indicator: 4 LED
Dimension: 165*83*21.5mm
Weight: 438g

Carbon Texture

AS-290

10,000mAh

- **Model:** AS-290 (AS-467)
- **Capacity:** 10,000mAh/37Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2.1A
- **Output:** USB-A*2 5V/2.4A each port
Total 12W
- **Power Indicator:** 4 LED
- **Dimension:** 142*74*14.9mm
- **Weight:** 238g
- **Remark:** Exclusive for Japan market





Model: AS-292
Capacity: 2,500mAh/9.25Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/1A
Output: USBA*1 5V/1A
Power Indicator: 4 LED
Dimension: 100*62*8mm
Weight: 63g



Model: AS-293
Capacity: 5,000mAh/18.50Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USBA*1 5V/2.4A
Power Indicator: 4 LED
Dimension: 140*72*8.5mm
Weight: 148g



Model: AS-294
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.1A
Output: USBA*2 5V/2.4A each port
Total 12W
Power Indicator: 4 LED
Dimension: 160*80*12mm
Weight: 238g



Model: AS-135
Capacity: 2500mAh/9.25Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/1A
Output: USB 5V/1A
Size: 95*24*22mm
Weight: 60g



Model: AS-201
Capacity: 7,500mAh/27.75Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB*2 5V/2.1A each port Total 5V/2.1A
Size: 95*63*22mm
Weight: 178g



Model: AS-303
Capacity: 12,500mAh/46.25Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB*2 5V/2.4A each port Total 5V/3.4A
Size: 126*83*22mm
Weight: 338g



Model: AS-200
Capacity: 5,000mAh/18.50Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB 5V/2.1A
Size: 95*43*22mm
Wight: 128g



Model: AS-202
Capacity: 10,000mAh/37Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB*2 5V/2.1A each port Total 5V/2.1A
Size: 95*82*22mm
Weight: 238g



Model: PB-AS304
Capacity: 15,000mAh/55.5Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB*2 5V/2.4A each port Total 5V/4.8A
Size: 150*83*22mm
Weight: 463g



Model: AS-116
Capacity: 2500mAh/9.25Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/1A
Output: USB 5V/1A
Power Indicator: 1 LED
Size: 95*24*22mm
Weight: 60g



Model: AS-253
Capacity: 5,000mAh/18.50Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB 5V/2.1A
Power Indicator: 4 LED
Size: 95*43*22mm
Wight: 128g



Model: AS-255
Capacity: 7,500mAh/27.75Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB*2 5V/2.1A each port
Total 5V/2.1A
Power Indicator: 4 LED
Size: 95*63*22mm
Weight: 178g



Model: AS-254
Capacity: 10,000mAh/37Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB*2 5V/2.1A each port
Total 5V/2.1A
Power Indicator: 4 LED
Size: 95*82*22mm
Weight: 238g



Model: AS-103
Capacity: 20,000mAh/74Wh
Battery Type: Li-ion 18650
Input: Micro USB 5V/2A
Output: USB*2 5V/2.1A each port
Total 5V/2.1A
Power Indicator: 4 LED
Size: 150*83*22mm
Weight: 463g



MS018
10,000mAh

- **Model:** MS018
- **Capacity:** 10,000mAh/37.00Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2.0A
- **Output:** USBA*2 5V/2.1A
- **Housing Material:** Anodized Aluminum
- **Power Indicator:** 4 LED
- **Dimension:** 139*74*13.9mm
- **Weight:** 262g



MS024
5,000mAh

- **Model:** MS024
- **Capacity:** 5,000mAh/18.50Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2.0A
- **Output:** USBA*1 5V/2.1A
- **Housing Material:** Anodized Aluminum
- **Power Indicator:** 4 LED
- **Dimension:** 118*63*11.6mm
- **Weight:** 152g





Model: MS019
Capacity: 6,700mAh/24.79Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2.0A
Output: USBA*2 5V/2.4A
Housing Material: Anodized Aluminum
Power Indicator: 4 LED
Dimension: 93*42*21.50mm
Weight: 146g



Model: MS021
Capacity: 10,050mAh/37.18Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2.0A
Output: USBA*2 5V/2.4A
Housing Material: Anodized Aluminum
Power Indicator: 4 LED
Dimension: 93*59*21.50mm
Weight: 205g



Model: MS023
Capacity: 13,400mAh/49.58Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V/2.0A
Output: USBA*2 5V/2.4A
Housing Material: Anodized Aluminum
Power Indicator: 4 LED
Dimension: 93*77*21.50mm
Weight: 275g



Model: AS099
Capacity: 10,000mAh/37.00Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V 2.0A
Output: USBA*2 5V 2.4A
Housing Material: CNC metal frame+ Plastic Housing
Power Indicator: 4 LED
Dimension: 142*72*15.0mm
Weight: 246g



Model: MS008
Capacity: 3,500mAh/12.95Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/1.0A
Output: USBA*1 5V/1.0A
Housing Material: CNC metal frame+ Metal Casing
Power Indicator: 4 LED
Dimension: 123*58*6.9mm
Weight: 123g



Model: MS086
Capacity: 10,000mAh/37.00Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.0A
Output: USBA*2 5V/2.4A
Housing Material: Die-casting alloy
Power Indicator: 4 LED
Dimension: 134*68*12.6mm
Weight: 286g



Model: MS097
Capacity: 10,000mAh/37.00Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2.0A
Output: USBA*2 5V/2.4A
Housing Material: Die-casting alloy
Power Indicator: 4 LED
Dimension: 134*68*12.6mm
Weight: 286g



AS-309
30,000mAh

- **Model:** AS-309
- **Capacity:** 30,000mAh/111Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2.0A, Type C 5V/3.0A
- **Output:** USB-A*3 5V/2.4A each port, Type C 5V/3.0A
Total DC Output 5V/4.2A Max
- **Housing Material:** Plastic Housing
- **Power Indicator:** 4 LED display
- **Dimension:** 175*114*22.6mm
- **Weight:** 685g



Leather Texture Design

AS-322
30000mAh

- Very flexible due to 4 outputs(1 Type-C & 3 USB)
- The smart digital LED display shows the exact percentage of remaining power
- Multiple smart protection functions



Specification

- **Model:** AS-322
- **Capacity:** 30,000mAh/111Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2.0A, Type C 5V/3.0A
- **Dimension:** 179*116*22.6mm
- **Output:** USB-A*3 5V/2.4A each port, Type C 5V/3.0A
Total DC Output 5V/4.2A Max
- **Housing Material:** CNC metal frame+ Plastic Housing
- **Power Indicator:** Digital LED display
- **Weight:** 685g

AS-310
30,000mAh

- **Model:** AS-310
- **Capacity:** 30,000mAh/111Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V 2.0A, Type C 5V 3.0A
- **Output:** USB-A*3 5V 2.4A each port, Type C 5V 3.0A
Total DC Output 5V 4.2A Max
- **Housing Material:** Plastic Housing
- **Power Indicator:** 4 LED display
- **Dimension:** 175*114*22.6mm
- **Weight:** 685g



MS065Q3
10,050mAh

- **Model:** MS065Q3
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V-6V/3A 6-9V/2A 9-12V/1.5A
- **Output:** USBA*1 5V-6V/3A 6-9V/2A 9-12V/1.5A
- **Housing Material:** Anodized Aluminum
- **Power Indicator:** 4 LED display
- **Dimension:** 103*61*23mm
- **Weight:** 230g



AS223Q3
10,050mAh

- **Model:** AS-223Q3
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion Battery 18650
- **Input:** Micro USB 5V-6V/3A 6-9V/2A 9-12V/1.5A
- **Output:** USBA*1 5V-6V/3A 6-9V/2A 9-12V/1.5A
- **Housing Material:** Plastic housing
- **Power Indicator:** 4 LED display
- **Dimension:** 103*61*23mm
- **Weight:** 195g



MS066Q3
10,050mAh

- **Model:** MS066Q3
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V-6V/3A 6-9V/2A 9-12V/1.5A
- **Output:** USB1 5V-6V/3A 6-9V/2A 9-12V/1.5A
USB 2 5V/1A Total 23W
- **Housing Material:** Anodized Aluminum
- **Power Indicator:** 4 LED display
- **Dimension:** 113*61*23mm
- **Weight:** 245g



AS223Q3-K
10,050mAh

- **Model:** AS-223Q3-K
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion Battery 2065
- **Input:** Micro USB 5V-6V/3A 6-9V/2A 9-12V/1.5A
- **Output:** USBA*1 5V-6V/3A 6-9V/2A 9-12V/1.5A
- **Housing Material:** Plastic housing
- **Power Indicator:** 4 LED display
- **Dimension:** 103*61*25mm
- **Weight:** 195g



AS233Q3-J
20,100mAh

- **Model:** AS233Q3-J
- **Capacity:** 20,100mAh/74.37Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
- **Output:** USB1 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
USB 2 5V/1A, Total 23W
- **Housing Material:** Anodized Aluminum
- **Power Indicator:** Digital LED display
- **Dimension:** 151*74.9*22.5mm
- **Weight:** 364g




AS320Q3
10,050mAh

- **Model:** AS320Q3
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
- **Output:** USB1 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
USB 2 5V/1A, Total 23W
- **Housing Material:** Plastic Housing
- **Power Indicator:** Digital LED display
- **Dimension:** 105*62*22.5mm
- **Weight:** 264g



Model: MS021Q3
Capacity: 10,050mAh/37.18Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
Output: USB1 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
Housing Material: Anodized Aluminum
Power Indicator: 4 LED display
Dimension: 105*59*22mm
Weight: 220g

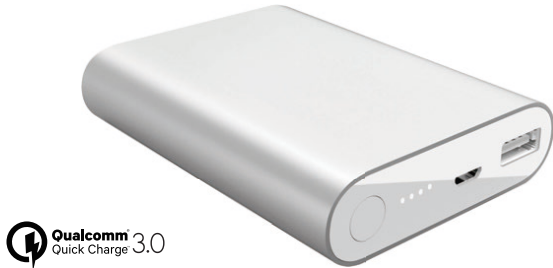

Model: MS023Q3
Capacity: 10,000mAh/37Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
Output: USB1 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
Housing Material: Anodized Aluminum
Power Indicator: 4 LED display
Dimension: 105*77*22mm
Weight: 328g



Model: MS018Q3
Capacity: 10,000mAh/37Wh
Input: Micro USB 5-9V/2A, 9-12V/1.5A
Output: USB1 5-6V /3A, 6-9V/2A, 9-12V/1.5A
Housing Material: Anodized Aluminum
Power Indicator: 4 LED display
Dimension: 149*74*14mm
Weight: 266g



Model: MS018QT
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Type-C 5V/3A
Micro USB 5-6V/3A, 6-9V/2A, 9-12V/1.5A
Output: Type-C 5V 3A
USB1 5-6V/3A, 6-9V/2A, 9-12V/1.5A
DC Output Total: 18W
Housing Material: Anodized Aluminum
Power Indicator: 4 LED display
Dimension: 149*74*13.9mm
Weight: 240g



Hidden Cable

Model: MS106T3
Capacity: 20,100mAh/74.37Wh
Battery Type: Li-ion battery 18650
Input: Type-C 5V/3A
Micro USB 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
Output: Type-C 5V/3A
USBA*1 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
DC Output Total 23W
Housing Material: Anodized Aluminum
Power Indicator: Digital LED display
Built-in portable Micro USB and Type C cable
Dimension: 173*78*22.5mm
Weight: 394g



Model: MS107T3
Capacity: 10,050mAh/37.18Wh
Battery Type: Li-ion battery 18650
Input: Type-C 5V/3A, Micro USB 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
Output: Type-C 5V/3A, USBA*1 5V-6V /3A, 6-9V/2A, 9-12V/1.5A
DC Output Total: 23W
Housing Material: Anodized Aluminum
Power Indicator: Digital LED display
Built-in portable Micro USB and Type C cable
Dimension: 118*78*22.5mm
Weight: 264g

Hidden Cable

AS-507
10,000mAh

Model: AS507
Capacity: 10,000mAh/37Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V 2.0A
Output: USBA*1 5V 2.4A
Housing Material: Painted plastic housing
Built-in portable Micro USB cable/type C cable
Power Indicator: 4 LED
Dimension: 151*74*15mm
Weight: 223g



AC004TC

3,500mAh

- **Model:** AC004TC
- **Capacity:** 3,500mAh/12.95Wh
- **Battery Type:** Li-polymer battery
- **Input:** AC 100-240V/0.1A max, DC Micro USB 5V/2A
- **Output:**
 1. AC plugged in as an adapter: USBA 5V 2.4A, Built-in Type-C cable 5V 3A, Built-in Micro USB cable 5V/2.4A, Total DC output 17W
 2. No AC power source as a powerbank: USBA 5V/2A, Built-in Type C cable 5V/2A, Built-in Micro USB cable 5V/2A, Total DC output 12W
- **Housing Material:** Rubber oil painted plastic housing
- **Power Indicator:** 4 LED
- **Dimension:** 128*66*13mm
- **Weight:** 135g



AC-015TC

6,700mAh

- **Model:** AC-015TC
- **Capacity:** 6,700mAh/24.79Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** AC 100-240V/0.15A Max
- **Output:**
 1. AC plugged in as an adapter: USBA 5V/2.4A, Type C 5V/3A, Total DC output 15W
 2. No AC power source as a powerbank: USBA 5V/2.4A, Type-C 5V/3A, Total DC output 15W
- **Housing Material:** Fire-proof PC
- **Power Indicator:** LED around button
- **Dimension:** 80*75*27mm
- **Weight:** 185g



LS027

4,000mAh

- **Model:** LS-027
- **Capacity:** 4,000mAh/14.80Wh
- **Battery Type:** Li-polymer battery
- **Input:** Built-in USB Cable 5V 2A
- **Output:** Built-in Micro USB cable 5V 2A, Built-in Lightning cable 5V 1A
- **Housing Material:** Rubber oil painted plastic housing
- **Power Indicator:** 4 LED
- **Dimension:** 118*61*12.4mm
- **Weight:** 108g



AC-016

6,700mAh

- **Model:** AC-016
- **Capacity:** 6,700mAh/24.79Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** AC 100-240V 0.15A max, Micro USB 5V 2A
- **Output:**
 1. AC plugged in as an adapter: USBA*2 5V 2.4A each port, Total DC output 15W
 2. No AC power source as a powerbank: USBA*2 5V 2.4A each port, Total DC output 15W
- **Housing Material:** Fire-proof PC
- **Power Indicator:** LED around button
- **Dimension:** 80*75*27mm
- **Weight:** 185g






Model: SP-040TC
Capacity: 3,350mAh/12.39Wh
Battery Type: Li-ion battery 20650
Input: Micro USB 5V/1A
Output: USB-A*1 5V/1A
Power Indicator: 4 LED
Dimension: 98*28*26 mm
Weight: 85g



Model: SP-039TC
Capacity: 6,700mAh/24.79Wh
Battery Type: Li-ion battery 20650
Input: Type-C 5V/3A
Output: Type-C 5V/3A, USB-A 5V/2.4A Total 15W
Power Indicator: 4 LED
Dimension: 105*56*26 mm
Weight: 145g
IP65 Waterproof



Model: SP-412TC
Capacity: 10,050mAh/37.18Wh
Battery Type: Li-ion battery 20650
Input: Type C 5V/3A
Output: Type C 5V/3A, USB-A*2 5V/2.4A each port
Total 15W
Power Indicator: 4 LED
Dimension: 130*78*26 mm
Weight: 285g
IP65 Waterproof

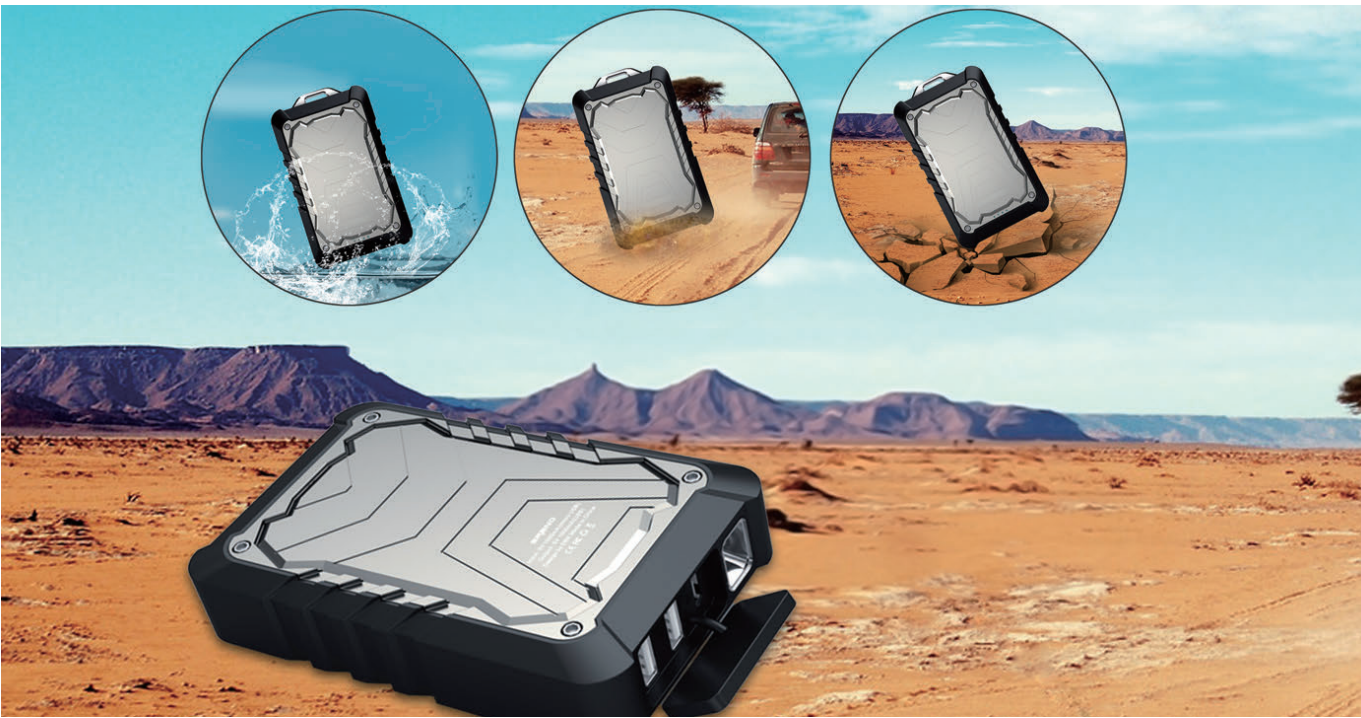

IP65 Waterproof

SP002
10,050mAh

- **Model:** SP-002
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/2A
- **Output:** USB-A*2 5V/2.4A each port
Total 15W
- **Power Indicator:** 4 LED
- **Housing material:** Metal+ Silicone+ Plastic
- **Dimension:** 114*68*27 mm
- **Weight:** 265g
- **IP65 Waterproof**



Power Bank


IP65 Waterproof

<http://www.dbk.com.hk>

SP-021

6,700mAh

- **Model:** SP-021
- **Capacity:** 6,700mAh/24.79Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/2A
- **Output:** USB-A 5V/2.4A
- **Power Indicator:** 4 LED
- **Housing material:** Metal+ Silicone+ Plastic
- **Dimension:** 120*52*27 mm
- **Weight:** 184g
- **IP65 Waterproof**

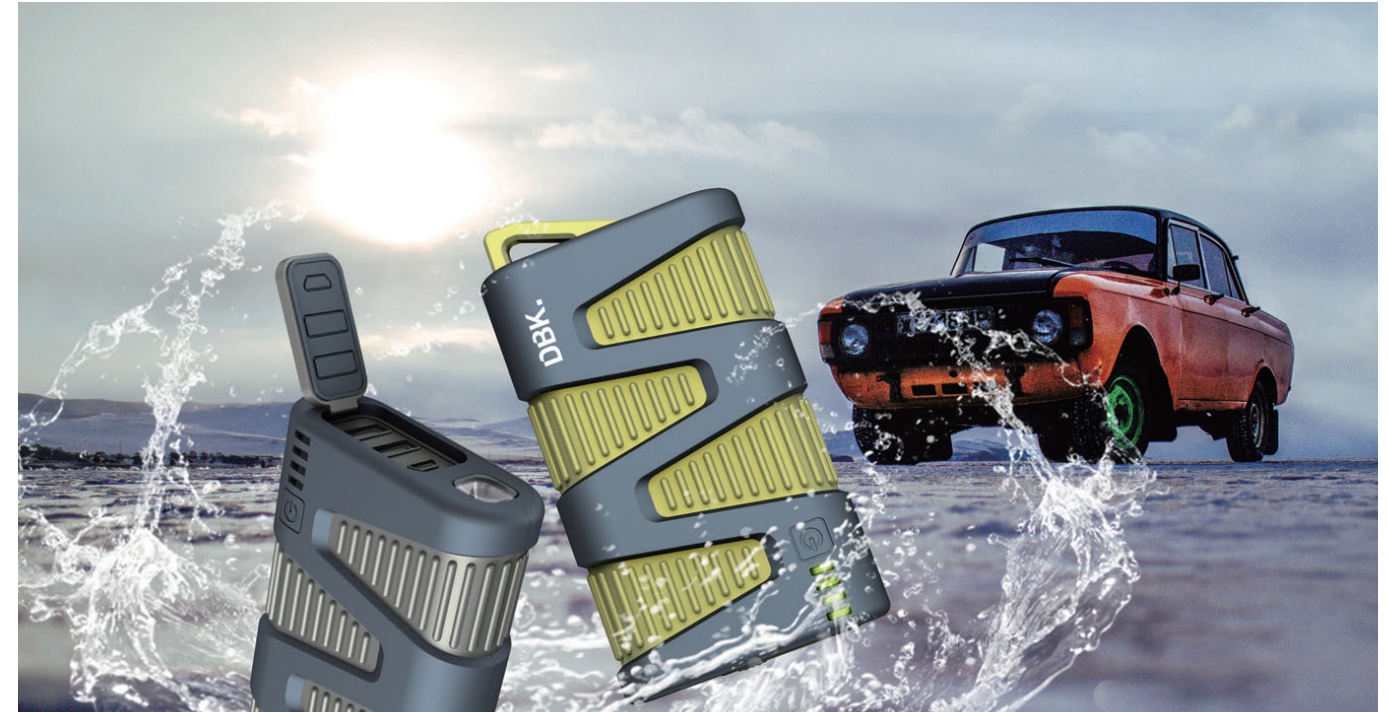

IP65 Waterproof

SP-013

16,750mAh

- **Model:** SP-013
- **Capacity:** 16,750mAh/61.97Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/2A
- **Output:** USB-A*2 5V/2.4A each port
Total 15W
- **Power Indicator:** 4 LED
- **Housing material:** Metal+ Silicone+ Plastic
- **Dimension:** 141*77*27 mm
- **Weight:** 395g
- **IP65 Waterproof**




IP65 Waterproof

SP015

10,050mAh

- **Model:** SP-015
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/2A
- **Output:** USB-A*2 5V/2.4A each port
Total 17W
- **Power Indicator:** 4 LED
- **Housing material:** Double injection plastic
- **Dimension:** 126*74*22 mm
- **Weight:** 245g
- **IP65 Waterproof**

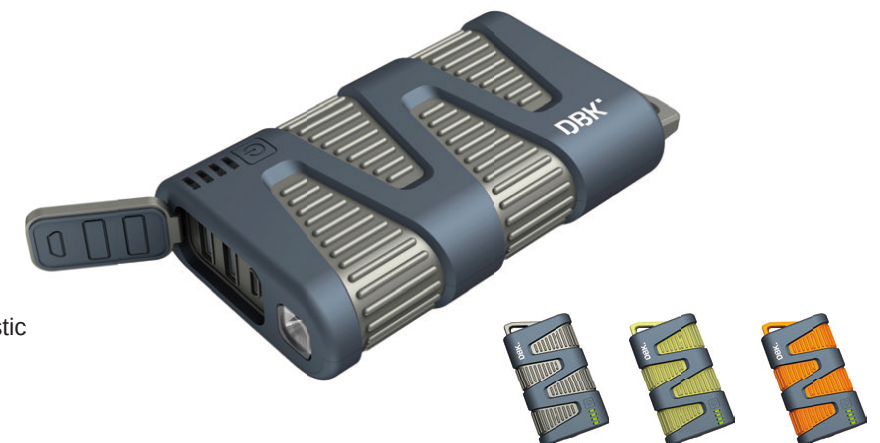



Car Jump Starter

SP-006 13,500mAh

- **Model:** SP-006
- **Capacity:** 13,500mAh/49.95Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** DC 12-24V
- **Output:** USB-A 5V/2.4A
DC 12V for Car Jump Start 150A
- **Peak current:** 500A
- **Triangle red alarm light + LED flashlight:** 3W
- **Power Indicator:** 4 LED
- **Housing material:** Double injection plastic
- **Dimension:** 218*115*38 mm
- **Weight:** 902g
- **IP65 Waterproof**



Car Jump Starter

SP-011 5,400mAh

- **Model:** SP-011
- **Capacity:** 5,400mAh/19.98Wh
- **Battery Type:** Li-polymer Battery
- **Input:** Micro USB 5V/2.1A
- **Output:** USB-A 5V/2.4A
DC 12V for Car Jump Start 130A
- **Peak current:** 200A
- **Power Indicator:** 4 LED
- **Housing material:** Plastic
- **Dimension:** 139*79*17 mm
- **Weight:** 239g



Car Jump Starter

SP-012 4,000mAh

- **Model:** SP-012
- **Capacity:** 4,000mAh/14.80Wh
- **Battery Type:** Li-polymer Battery
- **Input:** Micro USB 5V/2.1A
- **Output:** USB-A 5V/2.4A
DC 12V for Car Jump Start 130A
- **Peak current:** 200A
- **Power Indicator:** 4 LED
- **Housing material:** Plastic
- **Dimension:** 139*66*15 mm
- **Weight:** 190g






Model: SS-004
Capacity: 8,000mAh/29.60Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2A
Solar charge 5V 200mA max
Output: USBA*1 5V/2.4A
LED flashlight: 0.5W
Power Indicator: 4 LED
Housing material: Double injection ABS housing
Dimension: 130*78*17 mm
Weight: 265g



Model: SS-003
Capacity: 10,000mAh/37 Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2A
Solar charge 5V/200mA max
Output: USBA*2 5V/2.4A each port, total 2.4A
LED flashlight:0.5W
Power Indicator: 4 LED
Housing material: Plastic
Design for easily using with Carabiner
Dimension: 153*75*17 mm
Weight: 264g

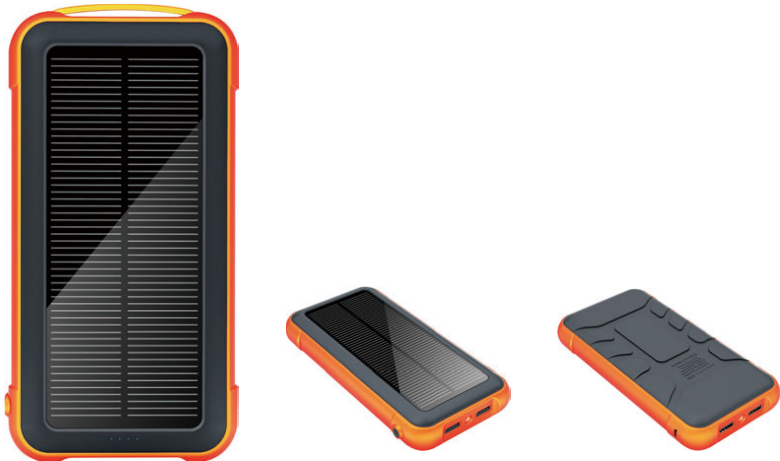

Model: SS-006
Capacity: 20,000mAh/74 Wh
Battery Type: Li-ion battery 18650
Input: Micro USB 5V 2A
Solar charge 5V 200mA max
Output: USBA*2 5V 2.4A each port, total 2.4A max
LED flashlight:0.5W
Power Indicator: 4 LED
Housing material: Plastic
Dimension: 162*82*26 mm
Weight: 485g



Model: SS-005
Capacity: 5,000mAh/18.5 Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V/2A
Solar charge 5V/200mA max
Output: USBA*1 5V/2.4A
LED flashlight:0.5W
Power Indicator: 4 LED
Housing material: Plastic
Design for easily using with Carabiner
Dimension: 132*65*15 mm
Weight: 145g



Model: SS-007
Capacity: 15,000mAh/55.50Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V 2A
Solar charge 5V 200mA max
Output: USBA*2 5V 2.4A each port, total 2.4A max
Power Indicator: 4 LED
Housing material: Plastic
Dimension: 142*72*21 mm
Weight: 365g



Model: SS-009
Capacity: 10,000mAh/37 Wh
Battery Type: Li-polymer battery
Input: Micro USB 5V 2A
Solar charge 5V 200mA max
Output: USBA*2 5V/2.4A each port, total 2.4A
LED flashlight:0.5W
Power Indicator: 4 LED
Housing material: Plastic
Dimension: 147*79*17.8 mm
Weight: 264g



Model: MP-20000A
Capacity: 22,800mAh/84.36Wh
Battery Type: Li-polymer Battery
Input: DC 12-24V/2A
Output: USB-A*2 5V/2.4A each port, total 3.4A max
DC 5.5*2.1mm 9V/4A, 12V/4A, 16V/4A, 19V/3.5A, 20V/3.0A
Power Indicator: LCD Display
Housing material: Plastic+metal
Dimension: 185*124*19.6 mm
Weight: 581g



Model: MP-32000
Capacity: 34,200mAh/126.54 Wh
Battery Type: Li-polymer Battery
Input: DC 12-24V/2A
Output: USB-A*2 5V/2.4A each port, total 3.4A max
DC 5.5*2.1mm 9V/4A, 12V/4A, 16V/4A, 19V/3.5A, 20V/3.0A
Power Indicator: LCD Display
Housing material: Plastic+metal
Dimension: 185*124*26 mm
Weight: 815g



Model: MP-30000
Capacity: 31,200mAh/115.44 Wh
Battery Type: Li-ion Battery 18650
Input: DC 12-24V/2A
Output: USB-A*2 5V/2.4A each port, total 3.4A max
DC 5.5*2.1mm 9V/3.8A, 12V/3.8A, 16V/3.8A, 19V/3.8A, 20V/3.8A
Power Indicator: LCD Display
Housing material: Plastic+metal
Dimension: 214*80*38 mm
Weight: 825g




Model: MP-50000
Capacity: 52,800mAh/195.36 Wh
Battery Type: Li-ion Battery 18650
Input: DC 12-24V/2A
Output: USB-A*2 5V/2.4A each port, total 3.4A max
DC 5.5*2.1mm 9V/3.8A, 12V/3.8A, 16V/3.8A, 19V/3.8A, 20V/3.8A
Power Indicator: LCD Display
Housing material: Plastic+metal
Dimension: 214*80*56 mm
Weight: 1325g



Model: PB-12000
Capacity: 12,000mAh/44.40Wh
Battery Type: Li-polymer Battery
Input: DC 12-24V/2A
Output: USB-A*1 5V/2.4A
DC 5.5*2.1mm 12V/2A, 16V/2A, 19V/2A
Power Indicator: 4 LED
Housing material: Aluminum housing
Dimension: 170*77*17 mm
Weight: 395g



Model: PB-18000
Capacity: 16,000mAh/59.2Wh
Battery Type: Li-polymer Battery
Input: DC 12-24V/2A
Output: USB-A*1 5V/2.4A
DC 5.5*2.1mm 12V/3.8A, 16V/3.8A, 19V/3.8A
Power Indicator: 4 LED
Housing material: Aluminum housing
Dimension: 170*77*24 mm
Weight: 395g

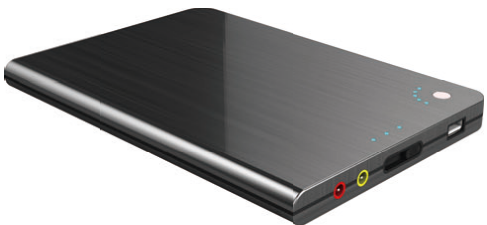

Model: MP-16000
Capacity: 15,600mAh/57.72 Wh
Battery Type: Li-polymer Battery
Input: DC 12-24V/2A
Output: USB-A*1 5V/2.4A
DC 5.5*2.1mm 12V/4A, 16V/3.5A, 19V/3A
Power Indicator: 4 LED
Housing material: Aluminum housing
Dimension: 185*124*14.5 mm
Weight: 495g



Model: PB-24000
Capacity: 23,400mAh/86.50Wh
Battery Type: Li-polymer Battery
Input: DC 12-24V/2A
Output: USB-A*1 5V/2.4A
DC 5.5*2.1mm 12V/4A, 16V/3.5A, 19V/3A
Power Indicator: 4 LED
Housing material: Aluminum housing
Dimension: 170*124*20 mm
Weight: 695g


Power Bank

Aluminum Surface


PT-18

18,000mAh

- **Model:** PT-18
- **Capacity:** 18,000mAh/66.60 Wh
- **Battery Type:** Li-polymer Battery
- **Input:** DC 12-24V 1.8A
- **Output:** USB-A*2 5V 2.4A each port, total 5V/3.1A
DC 5.5*2.1mm 12V 3.2A, 16V 3.2A, 19V 3.2A
- **Power Indicator:** 4 LED
- **Housing material:** Aluminum housing
- **Dimension:** 192*85*21.80 mm
- **Weight:** 539g

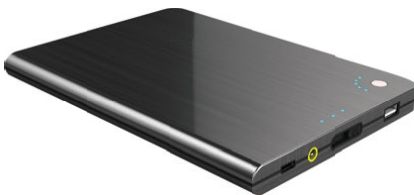

Model: MP-16000TP
Capacity: 20000mAh / 74Wh
Input: Type-C PD3.0 45W
Output: DC 5.5*2.1mm 12V/4A 16V/3.5A 19V/3A
USB-A 5V/2.4A, Type-C PD3.0 45W
Dimension: 185*124*14.5 mm
Weight: 495g

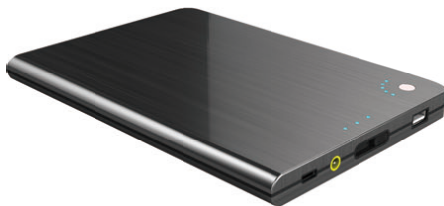

Model: MP-24000TP
Capacity: 23,400mAh / 86.50Wh
Input: Type-C PD3.0 45W
Output: DC 5.5*2.1mm 12V/4A 16V/3.5A 19V/3A
USB-A 5V/2.4A, Type-C PD3.0 45W
Dimension: 170*124*20 mm
Weight: 695g



Model: MP-20000TP
Capacity: 25,200mAh/93.24Wh
Input: Type-C PD3.0 45W
Output: DC 5.5*2.1mm 9V/4A, 12V/4A, 16V/4A,
19V/3.5A, 20V/3.0A
USB-A 5V/2.4A, Type-C PD3.0 45W
Dimension: 185*124*19.6 mm
Weight: 581g



Model: MP-32000TP
Capacity: 37500mAh/138.75Wh
Battery Type: Li-polymer Battery
Input: Type-C PD3.0 45W
Output: DC 5.5*2.1mm 9V/4A, 12V/4A, 16V/4A,
19V/3.5A, 20V 3.0A
USB-A 5V/2.4A, Type-C PD3.0 45W
Dimension: 185*124*26 mm
Weight: 815g

Aluminum Surface

PT-28

28,800mAh

- **Model:** PT-28
- **Capacity:** 28,800mAh/106.56Wh
- **Battery Type:** Li-polymer Battery
- **Input:** DC 12-24V 1.8A
- **Output:** USB-A*2 5V 2.4A each port, total 5V/3.1A
DC 5.5*2.1mm 12V 3.2A, 16V 3.2A, 19V 3.2A
- **Power Indicator:** 4 LED
- **Housing material:** Aluminum housing
- **Dimension:** 192*117*21.80 mm
- **Weight:** 839g



Model: MP-30000TP
Capacity: 31200mAh/115.44Wh
Battery Type: Li-ion Battery 18650
Input: Type-C PD3.0 45W
Output: DC 5.5*2.1mm 9V/3.8A 12V/3.8A 16V/3.8A
19V/3.8A 20V/3.8A
USB 5V/2.4A Type-C PD3.0 45W
Dimension: 214*80*38 mm
Weight: 825g



Model: MP-50000TP
Capacity: 52800mAh/195.36Wh
Battery Type: Li-ion Battery 18650
Input: Type-C PD3.0 45W
Output: DC 5.5*2.1mm 9V/3.8A 12V/3.8A 16V/3.8A
19V/3.8A 20V/3.8A
USB 5V/2.4A Type-C PD3.0 45W
Dimension: 214*80*56 mm
Weight: 1356g

Power Station



Potable Outdoor Power Station

CL-008PD 50,000mAh

- **Model:** CL-008PD
- **Capacity:** 50,000mAh/185 Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** DC 12V-30V
Type-C PD2.0 60W(Max)
- **AC Output:** 110V 250W or 220V 250W
- **3*USB Output:** 5V/2.4A each port Total 7.2A
- **Type-C Output:** PD2.0 5-20V 60W
- **2*DC Output:** 12V/5A Max
- **LED Flashlight:** 3W
- **Power Indicator:** Digital LED Display
- **Housing material:** Metal+ Plastic
- **Dimension:** 164*120*120 mm



Laptop(45W)
4 Recharges



Drone(90W)
2-3 Recharges



Gopro(14W)
40+ Recharges




Mini Fridge(40W)
4 hours



Mini Projector(15-45W)
5-12 hours



Lantern Light(5W)
40+ hours

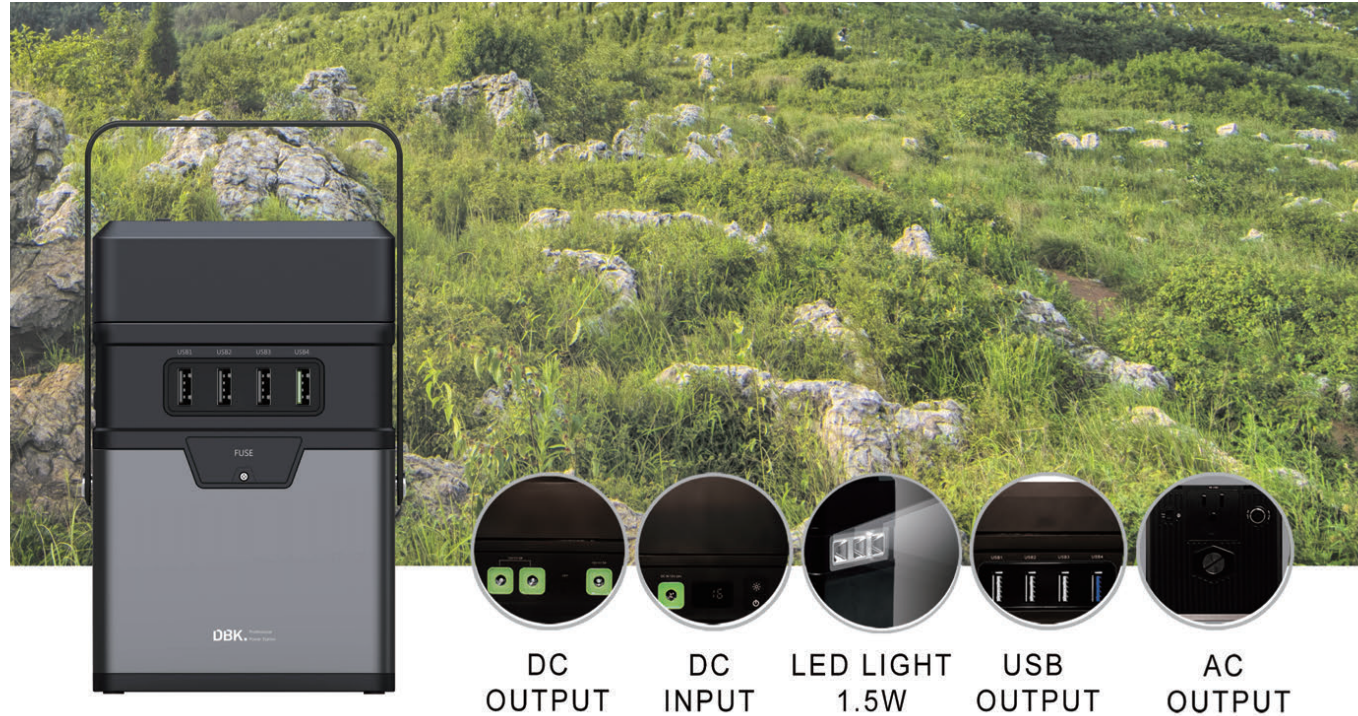

CL-002-K 100,000mAh

- **Model:** CL-002-K
- **Capacity:** 100,000mAh/370 Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** DC 12-30V
- **AC Output:** 110V or 220V 120W (150W max)
- **DC Output:** USBA 1/2/3 5V/2.4A each port, USBA4 5-6V/3A, 6-9V/2A, 9-12V/1.5A
2* DC 5.5*2.1mm 12V /4A, 1* DC 5.5*2.1mm 19V /4A
- **LED flashlight*3:** 1.5W
- **Power Indicator:** Digital LED Display
- **Housing material:** Metal+ Plastic
- **Dimension:** 216*100*100 mm
- **Weight:** 1664g



Potable Outdoor Power Station

CL-002-R 50,000mAh

- **Model:** CL-002-R
- **Capacity:** 50,000mAh/185 Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** DC 12-30V
- **AC Output:** 110V or 220V 120W (150W max)
- **DC Output:** USBA 1/2/3 5V/2.4A each port, USBA4 5-6V/3A, 6-9V/2A, 9-12V/1.5A
2* DC 5.5*2.1mm 12V /4A, 1* DC 5.5*2.1mm 19V /4A
- **LED flashlight*3:** 1.5W
- **Power Indicator:** Digital LED Display
- **Housing material:** Metal+ Plastic
- **Dimension:** 156*100*100 mm
- **Weight:** 864g



CL-002-Q 150,000mAh

- **Model:** CL-002-Q
- **Capacity:** 150,000mAh/555 Wh
- **Battery Type:** Li-ion battery 20650
- **Input:** DC 12-30V
- **AC Output:** 110V or 220V 120W (150W max)
- **DC Output:** USBA 1/2/3 5V/2.4A each port, USBA4 5-6V/3A, 6-9V/2A, 9-12V/1.5A
2* DC 5.5*2.1mm 12V /4A, 1* DC 5.5*2.1mm 19V /4A
- **LED flashlight*3:** 1.5W
- **Power Indicator:** Digital LED Display
- **Housing material:** Metal+ Plastic
- **Dimension:** 266*100*100 mm
- **Weight:** 1664g





AS-308

10,050mAh

- **Model:** AS-308
- **Capacity:** 10,050mAh/37.18Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/2A
- **Output:** USB-A*2 5V/2.1A each port Total 5V/2.1A
- **Power Indicator:** 4 LED
- **Housing material:** Rubber oil coated plastic housing
- **Dimension:** 102*72* 25 mm
- **Weight:** 185g



AS-438

5,000mAh

- **Model:** AS-438
- **Capacity:** 5,000mAh/18.50Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/2A
- **Output:** USB-A*1 5V/2.1A, Mini Fans: 2W
- **Power Indicator:** 4 LED
- **With base support**
- **Housing material:** Rubber oil coated plastic housing
- **Dimension:** 171*69.7*28.4 mm
- **Weight:** 155g





AS-374
3,500mAh

- **Model:** AS-374
- **Capacity:** 3,500mAh/12.95Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/1A
- **Output:** USB-A*1 5V/1A, Mini Fans:2W
- **Power Indicator:** 4 LED
- **Housing material:** plastic housing
- **Dimension:** 149*73*22 mm
- **Weight:** 145g



SD-004HM
3,200mAh

- **Model:** SD-004HM
- **Capacity:** 3,200mAh/11.84Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/2A
- **Output:** USB-A 5V/2.1A
- **Heating Power:** 5W
- **Housing material:** Rubber oil coated plastic housing
- **Dimension:** 80.5*87.5* 33 mm
- **Weight:** 175g



SDG-001
3,350mAh

- **Model:** SDG-001
- **Capacity:** 3,350mAh/12.39Wh
- **Battery Type:** Li-ion battery 18650
- **Input:** Micro USB 5V/1A
- **Output:** USB-A*1 5V/1A
- **Built-in Nano Spray mist**
- **Power Indicator:** 4 LED
- **Housing material:** Metallic painting plastic housing
- **Dimension:** 125*39*27.50 mm
- **Weight:** 145g




SDG-002
5,000mAh

- **Model:** SDG-002
- **Capacity:** 5,000mAh/18.50Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2A
- **Output:** USB-A*1 5V/2.1A
- **Built-in Nano Spray mist**
- **Power Indicator:** 4 LED
- **Housing material:** Metallic painting plastic housing
- **Dimension:** 125*62*25 mm
- **Weight:** 225g



AS123
5,000mAh

- **Model:** AS123
- **Including 5 powerbank and 1 charging base**
- **Powerbank AS123-B Spec.**
 - Capacity:** 5,000mAh/18.5Wh
 - Battery Type:** Li-ion battery 18650
 - Input:** DC 5V/0.65A
 - Output:** USB-A*2 5V/2.4A each port, Total: 2.4A
 - Power Indicator:** 1 LED
 - Housing material:** Metal housing
 - Dimension:** 96*42*22 mm

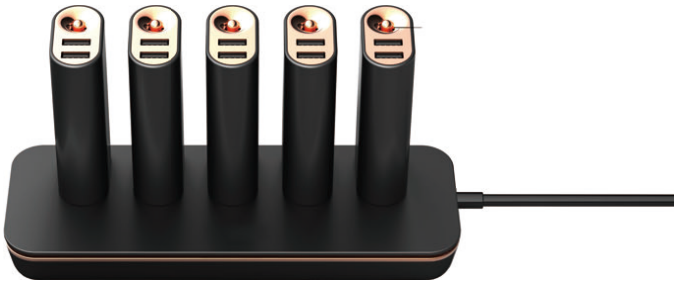

- **Charge base AS123-A spec.**
 - Input:** DC 12V /2A
 - Output:** DC 5V/0.65A
 - Dimension:** 199.5*68.5*26.5mm

Wireless Charger



PB-WST017
10000mAh



- **Model:** WST017
- **Capacity:** 10,000mAh/37Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2A, 9V/2A, 12V/1.5A
- **Output:** USB-A*1 5V/3A, 9V/2A, 12V/1.5A
- **Qi Wireless charge:** 5W
- **Power Indicator:** 4 LED
- **Housing material:** Plastic housing
- **Dimension:** 158*75* 20 mm
- **Weight:** 255g



Wireless Charger & Power Bank

WL-020
6,000mAh

- **Model:** WL-020
- **Capacity:** 6,000mAh/22.2Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2A
- **Output:** USBA*1 5V/2A
- **Qi Wireless charge:** 5W
- **Power Indicator:** 4 LED
- **Housing material:** Plastic housing
- **Dimension:** 122*67*14.5 mm
- **Weight:** 185g



Wireless Charger & Power Bank

WL-030
10,000mAh

- **Model:** WL-030
- **Capacity:** 10,000mAh/37Wh
- **Battery Type:** Li-polymer battery
- **Input:** Micro USB 5V/2A
- **Output:** USBA*2 5V/2.1A, Total 5V/2.1A
- **Qi Wireless charge:** 10W
- **Power Indicator:** 4 LED
- **Housing material:** Plastic housing
- **Dimension:** 155*78*20 mm
- **Weight:** 265g



Car Mount Wireless Charger

CP520

- **Model:**CP520
- **Housing Material:** Metal+ Plastic
- **Input:** Micro USB 5V/2A 9V/1.67A
- **Output:** DC 5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 2 Coil
- **Size:** 114*100*48mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- **Qi Certified for WPC V1.2.4**




Wireless Charger



Self-adjustable holder

CP510

- **Model:** CP510
- **Housing Material:** Metal+ Plastic
- **Input:** Micro USB 5V/2A
- **Ouput:** DC 5V/1A
- **Coil Qty:** 1 Coil
- **Size:** 104*76*50mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- **Qi Certified for WPC V1.2.4**

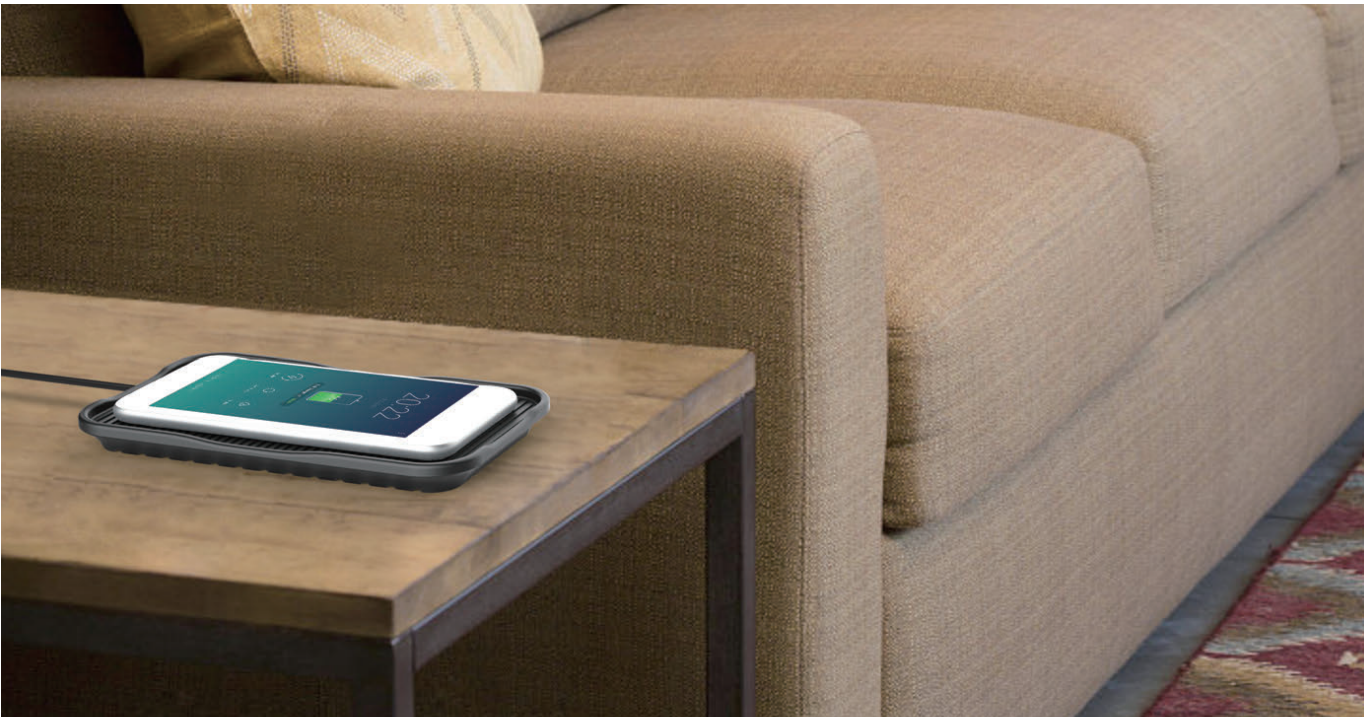

Multi Function Usage Wireless Charger

CP230

- **Model:** CP230
- **Housing Material:** Silicone
- **Input:** Micro USB 5V/2A 9V/1.67A
- **Ouput:** DC5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 3 Coil
- **Size:** 183x103x15mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- **Qi Certified for WPC V1.2.4**





Desktop Wireless Charger



CPX

- **Model:** CPX
- **Housing Material:** Metal +Plastic Housing
- **Input:** Micro USB 5V/2A 9V/1.67A
- **Ouput:** DC5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 3 Coil
- **Size:** 137*91*70mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- **Qi Certified for WPC V1.2.4**



CP610

- **Model:** CP610
- **Housing Material:** Plastic Housing
- **Input:** Micro USB 5V/2A 9V/1.67A
- **Ouput:** DC5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 1 Coil
- **Size:** φ90 x10mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- **Qi Compatible with WPC1.2.4**





Metal frame

CP681


- **Model:** CP681
- **Housing Material:** Metal frame+ Plastic Housing
- **Input:** Micro USB 5V/2A 9V/1.67A
- **Output:** DC5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 1 Coil
- **Size:** φ90 x10mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- Qi certified with WPC1.2.4



Furniture Wireless Charger

CP6732

- **Model:** CP6732
- **Housing Material:** Metal frame+ Plastic Housing
- **Input:** Micro USB 5V/2A 9V/1.67A
- **Output:** DC5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 1 Coil
- **Size:** φ89.5x22mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- Qi certified

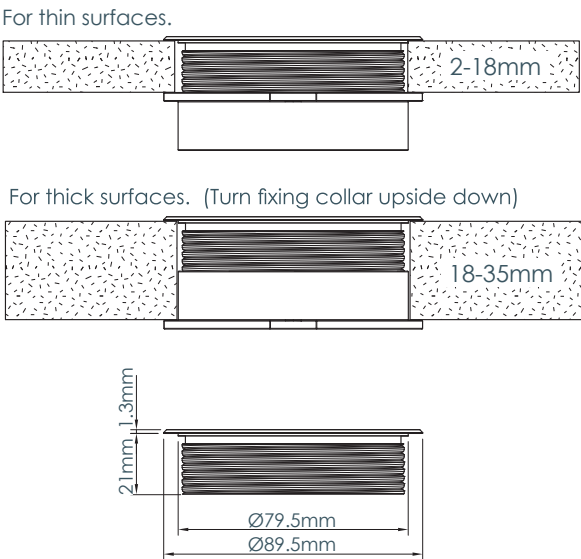

Wireless Charger

Furniture Wireless Charger



Model: CP622
Housing Material: Plastic Housing
Input: Micro USB 5V/2A 9V/1.67A
Ouput: DC5V/1A 5V/1.5A 9V/1.1A
Coil Qty: 1 Coil
Size: $\phi 89 \times 14.6\text{mm}$
Charging Distance: $\leq 8\text{mm}$
Charging efficiency: $\geq 75\%$
Qi certified




Model: CP6812CO
Housing Material: Metal frame+ Plastic Housing
Input: Micro USB 5V/2A 9V/1.67A
Ouput: DC5V/1A 5V/1.5A 9V/1.1A
Coil Qty: 1 Coil
Size: $\phi 89.5 \times 10.3\text{mm}$
Charging Distance: $\leq 8\text{mm}$
Charging efficiency: $\geq 75\%$
Qi certified




Instructions

Installation from top

1. Insert the device into the hole, fix the 3 screws from bottom with a screwdriver.

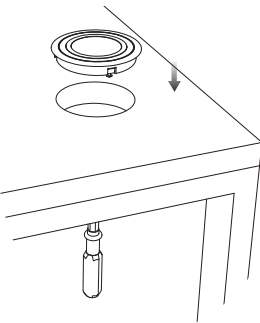

Installation on the bottom of your furniture

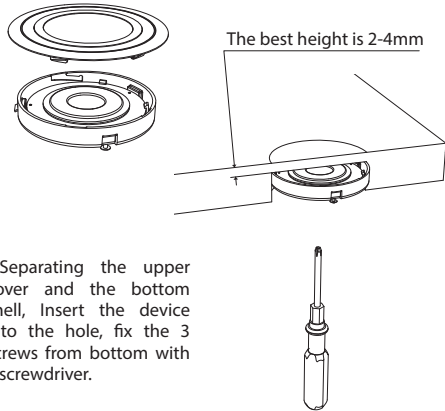

1. Separating the upper cover and the bottom shell, Insert the device into the hole, fix the 3 screws from bottom with a screwdriver.

WC-031WT

- **Model:** WC-031WT
- **Housing Material:** Metal frame+ glass front panel
- **Input:** Type-C 5V/2A
- **Ouput:** DC 5V/1A
- **Coil Qty:** 1 Coil
- **Size:** $\phi 99.5 \times 11.50\text{mm}$
- **Charging Distance:** $\leq 8\text{mm}$
- **Charging efficiency:** $\geq 75\%$
- **Qi compatible**



WC-032WT

- **Model:** WC-032WT
- **Housing Material:** Metal frame+ glass front panel
- **Input:** Type-C 5V/2A 9V/1.67A
- **Ouput:** DC5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 1 Coil
- **Size:** $\phi 99.5 \times 12.50\text{mm}$
- **Charging Distance:** $\leq 8\text{mm}$
- **Charging efficiency:** $\geq 75\%$
- **Qi compatible**



Leather Surface & Heat dissipating holes

WC-028WT

- **Model:** WC-028WT
- **Housing Material:** Metallic painting frame+ leather front panel
- **Input:** Type-C 5V/2A 9V/1.67A
- **Ouput:** DC 5V/1A 5V/1.5A 9V/1.1A
- **Coil Qty:** 3 Coil
- **Size:** 128*65*15mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- **Qi compatible**



WST-011

- **Model:** WST-011
- **Housing Material:** Plastic Housing
- **Input:** DC 5V/2A
- **Ouput:** DC 5V/1A
- **Coil Qty:** 3 Coil
- **Size:** 95*9589.6mm
- **Charging Distance:** ≤8mm
- **Charging efficiency:** ≥75%
- **Qi Certified**



WC-021WT
Input: Type-C 5V/2A 9V/1.8A
Wireless output: 5W; 7.5W; 10W(Max)
Support: 1device
Coil: single
Dimension: 100*100*13mm



WC-022WT
Input: Type-C 5V/2A 9V/1.8A
Wireless output: 5W; 7.5W; 10W(Max)
Support: 1device
Coil: multiple
Dimension: 143.5*81*14.7mm



WC-025WT
Input: Type-C 5V/2A 9V/1.8A
Wireless output: 5W; 7.5W; 10W(Max)
Support: 1device
Coil: single
Dimension: 99.5*99.5*13.5mm



WC-026WT
Input: Type-C 5V/2A 9V/1.8A
Wireless output: 5W; 7.5W; 10W(Max)
Support: 1device
Coil: multiple
Dimension: 163*81.4*13.4mm

HUB

»»» HUB



UC-035PH

- simple and compact design
- Aluminum alloy shell
- HDMI output mirrors 4K, support 3840*2160
- Support PD2.0 protocol, support 65W input and output



Specification

- **Host:** Type-C*1 Output: 65W(Max) PD2.0 Data speed(5Gbps)
- **Device:** USB3.0*1: 5V/1.5A Data speed(5Gbps) Type-C*1: 65W Data speed(5Gbps)
HDMI 2.0: 4K/30HZ RJ45: 10/100/1000mbps
- **Dimension:** 212*66*11mm



UC-034PW



- Simple, fashionable and compact design
- Good appearance and good protection with composite materials of ABS+PC
- Compatible with a variety of devices and functions

Specification

- **Wireless output:** 5W
- **Host:** Type-C1 PD2.0 45W(Max)
- **Device:** 2*USB 5V/1.5A Type-C2/3 65W(Max)
SD/TF UHS-II RJ45 10/100/1000mbps 2*HDMI 2.0 4K/30Hz
- **Dimension:** 107.5*74*22.9mm

UC-032AC



- USB & Type-C & AC & SD/TF & RJ45 & HDMI
- Support wireless charging
- Compatible with a variety of devices and systems

Specification

- **AC input port:** 100-240V/1.4A 50/60Hz
- **Host:** Type-C1 PD2.0 45W(Max)
- **Device:** 2*USB output 5V/2A Type-C 65W(Max)
SD/TF UHS-II RJ45 10/100/1000mbps HDMI 2.0 4K/30Hz
- **Dimension:** 100*100*30mm



UC-031ACW

- Simple, fashionable and compact design
- Support wireless charging
- Compatible with a variety of devices and systems



Specification

- **AC input port:** 100-240V/1.4A 50/60Hz
- **Host:** Type-C1 PD2.0 45W(Max)
- **Device:** 2*USB output 5V/2A Type-C 65W(Max)
- **Wireless output:** 5W; 7.5W; 10W(Max)
- **Dimension:** 100*100*30mm
- SD/TF UHS- II RJ45 10/100/1000mbps HDMI 2.0 4K/30Hz

UC-030ACW

- Simple, fashionable and compact design
- Good appearance and good protection with composite materials of ABS+PC
- Compatible with a variety of devices and functions



Specification

- **AC input port:** 100-240V AC
- **Host:** Type-C1 PD2.0 45W(Max)
- **Device:** 2*USB 5V/2A Type-C2 65W(Max)
- **Wireless output:** 5W; 7.5W; 10W(Max)
- **Dimension:** 110*110*33mm
- SD/TF UHS- II RJ45 10/100/1000mbps HDMI 2.0 4K/30Hz



UC-022PH



- simple and compact design
- Aluminum alloy shell
- HDMI output mirrors 4K,support 3840*2160
- Support PD2.0 protocol, support 65W input and output

Specification

- **Host:** Type-C*1 Output: 65W(Max) PD2.0 Data speed(5Gbps)
- **Device:** USB3.0*3: 5V/1.5A Data speed(5Gbps) Type-C*1 :65W Data speed(5Gbps)
HDMI 2.0: 4K/30HZ Audio jack: 3D Audio jack
- **Dimension:** 212*66*11mm

UC-018PH



- Type-C PD3.0 charging and data transmission function
- Ultra-thin Compact design & Multi-Color


Specification

- **Host:** Type-C*1 Output: PD3.0 85W(Max) Data speed(5Gbps)
- **Device:** USB3.0*2 5V/1.5A Data speed(5Gbps) Type-C1 input PD3.0 85W(Max) Data speed(5Gbps)
Type-C2 output 5V/1.5A Data speed(5Gbps) HDMI2.0*1: 4K/30Hz SD4.0*1: UHS- II TF3.0*1: UHS- II
- **Dimension:** 112*54*11.2mm
- **Cable Length:** 100mm



UC-010P2

- Ultra-thin Compact design
- Turn one computer's USB ports into two
- Up to 5 Gbps data super speeds
- Type-C PD3.0 charging and data transmission function

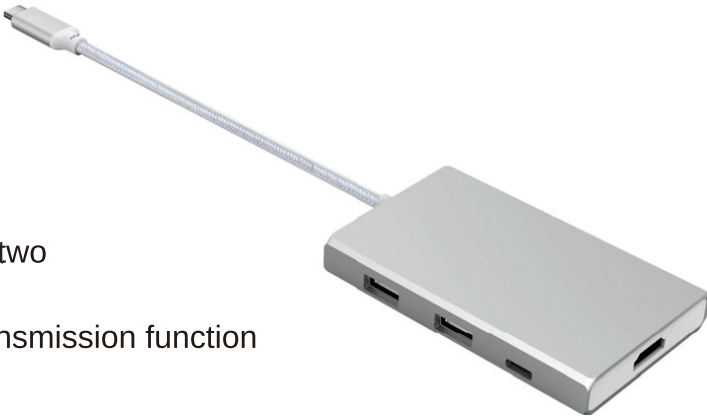


Specification

- **Host:** Type-C*1 Output: 75W(Max) PD3.0+QC3.0 Data speed(5Gbps)
- **Device:** USB3.0*2: 5V/1.5A Data speed(5Gbps) Type-C input: 75(Max) PD3.0+QC3.0 Data speed(5Gbps)
HDMI 4K/30Hz 1080P/60Hz
- **Dimension:** 142*75*10mm


UC-008VA

- Compact & Simple design
- Supports VGA SVGA resolutions up 1080p

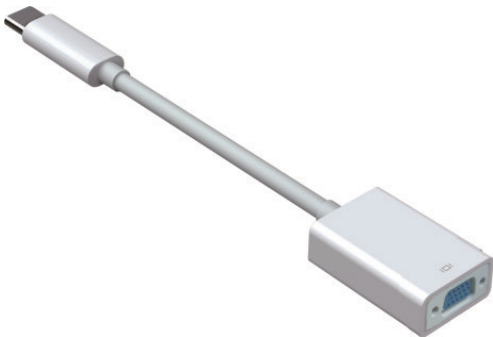

Specification

- **Host:** Type-C*1 12Gbps
- **Device:** VGA: 1080P/60HZ
- **Dimension:** 44.5*37*15 mm
- **Cable Length:** 140mm

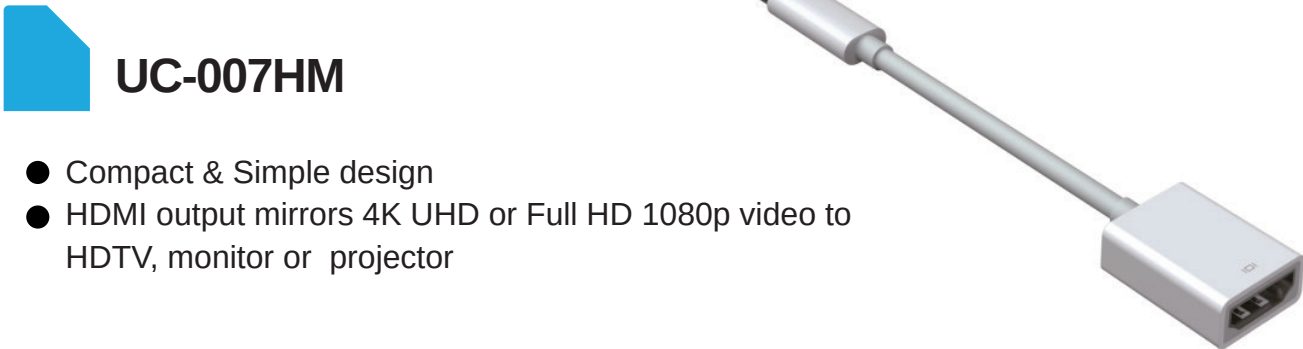

- Compact & Simple design
- HDMI output mirrors 4K UHD or Full HD 1080p video to HDTV, monitor or projector

Specification

- **Host:** Type-C*1 18 Gbps
- **Device:** HDMI 4K/30Hz 1080P/60Hz
- **Dimension:** 44.5*37*15 mm
- **Cable Length:** 140mm



UC-001P2
Host: Type-C output 65W Data speed(5Gbps)
Device: 5*USB 5V/1.5A Data speed(5Gbps)
Type-C input 65W Data speed(5Gbps)
Dimension: 133.5*64*17.3mm



UC-012P2
Host: Type-C output 65W Data speed(5Gbps)
Device: 7*USB3.0 5V/1.5A Data speed(5Gbps)
Type-C input 65W Data speed(5Gbps)
HDMI2.0 4K/30Hz Wireless output 5W
Dimension: 96.1*52.4*18.8mm



UC-003P2
Host: Type-C output 65W Data speed(5Gbps)
Device: 3*USB 5V/1.5A Data speed(5Gbps)
Type-C input 65W Data speed(5Gbps)
Dimension: 90*55.5*14.3mm



UC-002HI
Host: Type-C output 60W Data speed(5Gbps)
Device: USB 5V/1.5A Data speed(5Gbps)
Type-C input 60W Data speed(5Gbps)
HDMI 1080P/60Hz
Dimension: 70.6*51.3*15mm



UC-004UA
Host: Type-C output 65W Data speed(5Gbps)
Device: 4*USB 5V/1.5A Data speed(5Gbps)
Dimension: 90*55.5*14.3mm



UC-011P2
Host: Type-C output 65W Data speed(5Gbps)
Device: USB3.0 5V/1.5A Data speed(5Gbps)
Type-C input 65W Data speed(5Gbps)
VGA 1080P/Hz RJ45 10/100/1000 Ethernet
Dimension: 96.1*52.4*18.8mm



UC-016PR
Host: Type-C output 65W Data speed(5Gbps)
Device: 2*USB3.0 5V/1.5A Data speed(5Gbps)
Type-C input 75W Data speed(5Gbps)
HDMI2.0 4K/30Hz RJ45: 10/100/1000Ethernet
SD3.0 UHS- II TF UHS- II
Dimension: 140*46*17mm



UC-013P2
Host: Type-C output 65W Data speed(5Gbps)
Device: USB3.0 5V/1.5A Data speed(5Gbps)
Type-C input 65W Data speed(5Gbps)
HDMI2.0 4K/30Hz RJ45 10/100/1000 Ethernet
Dimension: 96.1*52.4*18.8mm

Adapter



Model: USB-099TP
Input: AC 100-240V 50-60Hz
Output: Type-C:PD2.0 45W 5V/3A, 9V/3A, 12V/3A, 15V/3A,20V/2.25A ;
 USB-A 5V 2.4A Total 57W
 Fixed foldable 2 Pin US AC plug, Changeable UK/EU/AU AC plug
Size: 71x68.5x 30mm
Weight: 144g



Model: USB-100TP
Input: AC 100-240V 50-60Hz
Output: Type-C:PD2.0 60W 5V/3A, 9V/3A, 12V/3A, 15V/3A,20V/3A
 Fixed foldable 2 Pin US AC plug, Changeable UK/EU/AU AC plug
Size: 71x68.5x 30mm
Weight: 134g



Model: USB-118PD
Input: AC 100-240V 50-60Hz
Output: Type C PD3.0 30W 5V 3A, 9V 3A, 12V 2.5A, 15V 2A;
 USB-A 5V 2.4A Total 30W
 Fixed foldable 2 Pin US AC plug, Changeable UK/EU/AU ACplug
Size: 59x59x 28mm
Weight: 125g



Model: USB-117PD
Input: AC 100-240V 50-60Hz
Output: Type-C:PD3.0 18W 5V/3A, 9V/2A, 12V/1.5A, 15V/1.2A;
 USB-A 5V/2.4A Total 18W
 Fixed 2 Pin US AC plug
Size: 57x41x 24mm
Weight: 64g



Model: MU040TC
Input: AC 100-240V 50-60Hz
Ouput: Type-C:5V/3A,
 USB A1/2/3/4/5 5V/2.4A each port, Total 50W
 Changeable 2 PIN AC Cable
Size: 102x77x 26mm
Weight: 185g



Model: MU040T3
Input: AC 100-240V 50-60Hz
Ouput: Type-C:1/2 5V/3A,
 USB A1/2/3 5V/2.4A each port, 35W max
 USB A4/5-6V/3A , 6-9V/2A, 9-12V/1.5A 18W max
 Total 53W
 Changeable 2 PIN AC Cable
Size: 102x77x 26mm
Weight: 195g



Model: MU042TC
Input: AC 100-240V 50-60Hz
Ouput: Type-C 1 5V/3A,
 USB A1/2/3/4 5V/2.4A each Total 25W
 Changeable 2 PIN AC Cable
Size: 98x60x26mm
Weight: 155g



Model: K-MU020TP
Input: AC 100-240V 50-60Hz
Output: Type-C:PD3.0 30W 5V/3A, 9V/3A, 12V/2.5A, 15V/2A,20V/1.5A ;
 USB2/3/4: 5V/2.4A each port 15W max
 Total 45W
 Fixed foldable 2 Pin US AC plug , Changeable UK/EU/AU AC plug
 Silver oil painting on housing
Dimension: 85*63*32mm
Weight: 177g



Model: K-MU019TP
Input: AC 100-240V 50-60Hz
Output: Type C PD3.0 30W 5V 3A, 9V 3A, 12V 2.5A, 15V 2A,20V 1.5A ;
 USB2/3/4: 5V/2.4A each port 15W max
 Total 45W
 Fixed foldable 2 Pin US AC plug , Changeable UK/EU/AU AC plug
 Silver oil painting on housing
Dimension: 85*63*32mm
Weight: 177g



Model: USB-015PD
Input: AC 100-240V 50-60Hz
Ouput: Type-C:PD2.0 30W 5V/3A, 9V/3A, 12V/2.5A, 15V/2A,20V/1.5A ;
 USB A1/2/3 5V/2.4A each port, 22W Max
 Total 52W
 Changeable 2 PIN AC Cable
Size: 102x77x 26mm
Weight: 185g



Model: K-MU016PD
Input: AC 100-240V 50-60Hz
Ouput: Type-C:PD2.0 30W 5V/3A, 9V/3A, 12V/2.5A, 15V/2A,20V/1.5A ;
 USB A1/2/3 5V/2.4A each port, 22W Max
 Total 52W
 Changeable 2 PIN AC Cable
Size: 102x77x26mm
Weight: 185g



Model: USB-017PD
Input: AC 100-240V 50-60Hz
Ouput: Type-C:PD2.0 30W 5V/3A, 9V/3A, 12V/2.5A, 15V/2A,20V/1.5A ;
 USB A1/2/3 5V 2.4A each port, 22W Max
 Total 52W
 Changeable 2 PIN AC Cable
Size: 102x77x 26mm
Weight: 185g



Model: K-MU031A
Input: AC 100-240V
Output: USB*5 5V/2.4A each Port, Total 40W;
 Aluminum Alloy Die-casting housing
Dimension: 105*100*18.8mm
Weight: 265g



Model: K-MU064
Input: AC 100-240V
Output: USB*5 5V/2.4A each Port, Total 40W;
 Aluminum middle frame+ Plastic Top/Bottom housing
Dimension: 105*100*18.2mm
Weight: 198g



Model: K-LU010QC
Input: AC 100-240V
Output: USB QC2.0 5V/2A;9V/2A;12V/1. 5A;
Fixed foldable 2 Pin US AC plug , Changeable UK/EU/AU AC plug
Dimension: 61*53*30mm
Weight: 177g



Model: K-LU009QC
Input: AC 100-240V
Output: USB QC2.0 5V/2A;9V/2A;12V/1. 5A;
Fixed foldable 2 Pin US AC plug , Changeable UK/EU/AU AC plug
Dimension: 61*53*30mm
Weight: 85g



Model: K-MU020QC
Input: AC 100-240V
Output: USB1: QC2.0 5V/2A;9V/2A;12V/1. 5A;
USB2/3/4: 5V/2.4A each port
Total 40W
Fixed foldable 2 Pin US AC plug , Changeable UK/EU/AU AC plug
Dimension: 85*63*32mm
Weight: 177g



Model: K-MU019QC
Input: AC 100-240V
Output: USB1: QC2.0 5V/2A;9V/2A;12V/1. 5A;
USB2/3/4: 5V/2.4A each port
Total 40W
Fixed foldable 2 Pin US AC plug , Changeable UK/EU/AU AC plug
Dimension: 85*63*32mm
Weight: 177g



Model: BC003TC
Input: AC 100-240V 50-60Hz
Ouput: Type-C 5V/3A
Fixed foldable 2 Pin US AC plug
Size: 88x56x14.5mm
Weight: 62g



Model: USB-044TC
Input: AC 100-240V 50-60Hz
Ouput: Type-C 5V/3A
Fixed foldable 2 Pin US AC plug
Size: 55x32x29mm
Weight: 48g




Model: USB-101TC
Input: AC 100-240V 50-60Hz
Ouput: Type-C 5V/3A
Fixed foldable 2 Pin US AC plug
Size: 55.5x38x21mm
Weight: 62g



Model: LU05EU
Input: AC 100-240V 50-60Hz
Ouput: USB A 5V/1A
Size: 34x39x21mm
Weight: 42g



Model: LU05AU
Input: AC 100-240V 50-60Hz
Ouput: USB A 5V/1A
Size: 34x39x21mm
Weight: 42g



Model: LU05UK
Input: AC 100-240V 50-60Hz
Ouput: USB A 5V/1A
Size: 34x39x21mm
Weight: 42g



Model: LU05US/ JP/CN
Input: AC 100-240V 50-60Hz
Ouput: USB A 5V/1A
Size: 34x39x21mm
Weight: 42g



Model: LU08EU
Input: AC 100-240V 50-60Hz
Ouput: USB A 5V/2.1A
Size: 48x41x 23mm
Weight: 45g



Model: LU08US/JP
Input: AC 100-240V 50-60Hz
Ouput: USB A 5V/2.1A
Size: 48x41x 23mm
Weight: 45g



Model: LU012
Input: AC 100-240V 50-60Hz
Ouput: USB A 5V/2.4A
Size: 48x41x23mm
Weight: 45g



Model: K-5B25
Input: AC 100-240V/50-60Hz
Output: USB*5 5V/2.4A each Port, Total 25W;
Dimension: 98*60*26mm
Weight: 155g



Model: K-MU015
Input: AC 100-240V/50-60Hz
Output: USB*6 5V 2.4A each Port, Total 50W;
Dimension: 100*69*26mm
Weight: 155g



Model: C4
Input: AC 100-240V/50-60Hz
Output: USB*4 5V/2.4A each Port, Total 25W;
Dimension: 68*68*28mm
Weight: 125g



Model: K-MU030
Input: AC 100-240V/50-60Hz
Output: USB*4 5V/2.4A each Port, Total 25W;
Dimension: 100*70*30mm
Weight: 205g



Model: K-MU012
Input: AC 100-240V/50-60Hz
Output: USB*5 5V 2.4A each Port, Total 25W;
Dimension: 98*60*26mm
Weight: 155g



Model: K-MU016
Input: AC 100-240V/50-60Hz
Output: USB*6 5V 2.4A each Port, Total 50W;
Dimension: 100*69*26mm
Weight: 155g



Model: K-MU021
Input: AC 100-240V/50-60Hz
Output: USB*4 5V/2.4A each Port, Total 25W;
Dimension: 68*68*28mm
Weight: 125g



Model: K-PS001A
Input: AC 100-240V/50-60Hz
Output: USB*6 5V/2.4A each Port, Total 50W;
Dimension: 108*108*25mm
Weight: 285g



Model: K-MU013
Input: AC 100-240V/50-60Hz
Output: USB*5 5V 2.4A each Port, Total 25W;
Dimension: 98*60*26mm
Weight: 155g



Model: K-MU017
Input: AC 100-240V/50-60Hz
Output: USB*6 5V 2.4A each Port, Total 50W;
Dimension: 100*69*26mm
Weight: 155g



Model: K-MU027
Input: AC 100-240V/50-60Hz
Output: USB*4 5V/2.4A each Port, Total 25W;
Dimension: 68*68*28mm
Weight: 108g



Model: K-MU029
Input: AC 100-240V/50-60Hz
Output: USB*4 5V/2.4A each Port, Total 25W;
Dimension: 68*68*28mm
Weight: 108g



Model: K-MU014
Input: AC 100-240V/50-60Hz
Output: USB*5 5V 2.4A each Port, Total 25W;
Dimension: 98*60*26mm
Weight: 155g



Model: K-MU018
Input: AC 100-240V/50-60Hz
Output: USB*5 5V 2.4A each Port, Total 40W;
Dimension: 98*60*26mm
Weight: 155g



Model: K-MU10
Input: AC 100-240V/50-60Hz
Output: USB*4 5V/2.4A each Port, Total 24W;
Dimension: 72*55*26mm
Weight: 108g



Model: K-MU11
Input: AC 100-240V/50-60Hz
Output: USB*4 5V/2.4A each Port, Total 24W;
Dimension: 72*55*26mm
Weight: 108g




MS-H010EU/UK/US

- Multi-color design;
- EU/UK/US AC plugs can be choose;
- 4 -USB ports;
- ID intelligent identification, constant current function;
- Multiple smart protection functions.

Specification

- **Power:** 2500W
- **Input:** AC 100-240V 50-60Hz
- **Output:** USB*4 5V/4.2A(TYP) Single 5V/2.4A(TYP)
- **Dimension(EU/UK):** 336mm*65mm*48.3mm
- **Dimension(US):**280mm*63mm*28mm **Cable Length:** 1.8M

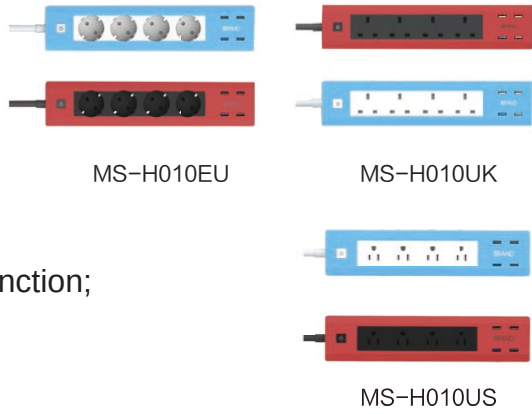

MS-H001
Power: 2500W
Input: AC 100-240V 50-60Hz
Output: 250V/10A single USB 5V/2.4A 4*USB 5V/4.2A
Dimension: 233*53*26mm



MS-H009
Power: 2500W
Input: AC 100-240V 50-60Hz
Output: 250V/10A single USB 5V/2.4A 4*USB 5V/2.4A
Dimension: 200*53*26mm



MS-H006
Power: 2500W
Input: AC 100-240V 50-60Hz
Output: 250V/10A single USB 5V/2.4A 4*USB 5V/4.2A
Dimension: 246*46*28mm



MS-H005
Power: 2500W
Input: AC 100-240V 50-60Hz
Output: 250V/10A single USB 5V/2.4A 2*USB 5V/2.4A
Dimension: 253*47*26mm



MS-H007
Power: 2500W
Input: AC 100-240V 50-60Hz
Output: 250V/10A single USB 5V/2.4A 2*USB 5V/2.4A
Dimension: 263*50*27mm



MS-H012US
Power: 2500W
Input: AC 100-240V 50-60Hz
Output: 250V/10A single USB 5V/2.4A 3*USB 5V/2.4A
Dimension: 254*46*28mm



Intelligent Power Adapter



PA060J

- Ultra-compact & light weight
- The Power Adapter can step up or step down the output voltage to self adapt relevant devices to achieve self adaptive power supply
- It can step down the voltage of the PD power bank or adapter and set up the current from DC input to Type-C output to relevant devices, like cell phone, notebook, monitor and game machine etc.



- **Input:** DC 12V-15V(Min 36W) 15V-24V(Min 60W)
- **Output:** Type-C PD2.0 5V-15V(Max 30W) 5V-20V(Max 45W)
- **Dimension:** 66.6*26.5*18mm

QT-CA-001

Input: Type-C PD2.0 20V(Min 45W)
Lenovo output: DC 20V(Max 45W)
Dimension: 57*18*10mm



PA060H

Input: Type-C PD2.0 5V-20V
Output: DC 5V/12V/15V/20V(Max 60W)
Dimension: 55*22*18mm




TC-004DC

Input: Type-C PD2.0 20V(Min 45W)
Lenovo output: DC 20V(Max 45W)
Cable Length: 1000mm



DC-001TC

Input: DC 19V-24V (Min 60W)
Output: Type-C
5V/9V/12V/15V/20V (Max 60W)
Cable Length: 1000mm

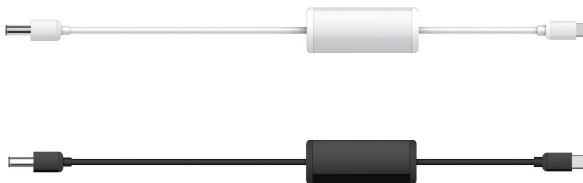

Car Charger



Model: CC-205PD
Input: DC 12-24V
Output: Type C PD3.0 5V/3A, 9V/2A, 12V/1.5A
USBA 5V/3A, 9V/2A, 12V/1.5A
Total 18W
Aluminum housing, LED light
Dimension: 59*25.4*23.6mm
Weight: 21.5g



Model: CC-207PD
Input: DC 12-24V
Output: Type C PD3.0 5V/3A, 9V/2A, 12V/1.5A
USBA 5V/3A, 9V/2A, 12V/1.5A
Total 18W
Aluminum +Plastic housing, LED light
Dimension: 59*25.4*23.6mm
Weight: 21.5g



Model: CC-206PD
Input: DC 12-24V
Output: Type C PD3.0 5V/3A, 9V/2A, 12V/2.5A
USBA 5V/3A, 9V/2A, 12V/1.5A Total 30W
Aluminum housing, LED light
Dimension: 70*26.4*23.6mm
Weight: 32.5g



Model: CC-208PD
Input: DC 12-24V
Output: Type C PD3.0 5V/3A, 9V/2A, 12V/2.5A,
USBA 5V/3A, 9V/2A, 12V/1.5A Total 30W
Aluminum housing +Plastic housing, LED light
Dimension: 70*26.4*23.6mm
Weight: 32.5g



Model: CC-127TP
Input: DC 12-24V
Output: Type C PD3.0 5V/3A, 9V/2A, 12V/2.5A
USBA 5V2.4A Total 30W
Chromed Copper Housing, LED light
Dimension: 59*25.4*23.6mm
Weight: 65g



Model: CC-128TP
Input: DC 12-24V
Output: Type C PD3.0 5V/3A, 9V 2A, 12V/1.5A
Chromed Copper Housing, LED light
Dimension: 56.5*25.4*23.6mm
Weight: 55g



Model: CP94Q3
Input: DC 12-24V
Output: USB-A 5V 3A, 9V 2A, 12V 1.5A
 Aluminum housing, LED light
Dimension: 59*26.4*23.6mm
Weight: 21.5g



Model: CP95Q3
Input: DC 12-24V
Output: USB-A 5V 3A, 9V 2A, 12V 1.5A
 Aluminum + Plastic housing, LED light
Dimension: 59*26.4*23.6mm
Weight: 21.5g



Model: CP96Q3
Input: DC 12-24V
Output: USB1 5V 3A, 9V 2A, 12V 2.5A
 USB2 5V 2.4A Total 23W
 Aluminum housing, LED light
Dimension: 70*26.4*23.6mm
Weight: 32.5g



Model: CP97Q3
Input: DC 12-24V
Output: USB1 5V 3A, 9V 2A, 12V 2.5A,
 USB2 5V 2.4A Total 23W
 Aluminum housing + Plastic housing, LED light
Dimension: 70*26.4*23.6mm
Weight: 32.5g



Model: CP26M
Input: DC 12-24V
Output: Type C 5V 3A
 USB-A1/2 5V 2.4A each port, Total 24W
 Aluminum + Plastic housing
Dimension: 67*39.5*26.4mm
Weight: 35g



Model: CP26J
Input: DC 12-24V
Output: USB-A*3 5V 2.4A each port, Total 25W
 Aluminum + Plastic housing
Dimension: 67*39.5*26.4mm
Weight: 35g



Model: CP26H
Input: DC 12-24V
Output: USB-A*3 5V 2.4A each port, Total 17W
 Aluminum + Plastic housing
Dimension: 67*39.5*26.4mm
Weight: 35g



Model: CP27A
Input: DC 12-24V
Output: USB-A*4 5V 2.4A each port, Total 40W
 Aluminum + Plastic housing
Dimension: 71*45.4*26.4mm
Weight: 55g



Model: CP75
Input: DC 12-24V
Output: for Car charger USB1/2 5V 2.4A each port, Total 5V/3.4A
 for Extension Charger USB1/2/3 5V 2.4A each port, Total 5V/5.8A
Extension Cord length: 1.5m
Dimension: Car charger 62*26.8*20.3mm
 Extension charger 80*60*22.80mm
Weight: 112g



Model: CP79-UH-B
Input: DC 12-24V
Output: for Car charger USB1/2 5V 2.4A each port, Total 5V/3.4A
 for Extension Charger USB1/2/3 5V 2.4A each port, Total 5V/4.8A
 Cigarette Lighter Port*2 12-24V/3A max
Extension Cord length: 1.0m
Dimension: Car cord 65*25.8*20.3mm
 Extension charger 85*65*65mm
Weight: 213g



Model: CP133
Input: DC 12-24V
Output: USB*2 5V 2.4A each port, Total 5V/3.6A Chromed Copper, LCD show Car battery Voltage
Dimension: 62*29.7*23.6mm
Weight: 65g



Model: CP31B
Input: DC 12-24V
Output: USB*2 5V 2.4A each port, Total 5V/3.4A Chromed Copper, Blue LED light in circle
Dimension: 53.4*25.4*20.3mm
Weight: 45g



Model: CC140
Input: DC 12-24V
Output: USB*2 5V 2.4A each port, Total 5V/3.4A Chromed Copper, Blue LED light in circle
Dimension: 73.4*25.4*20.3mm
Weight: 45g



Model: CP28
Input: DC 12-24V
Output: USB*2 5V 2.4A each port, Total 5V/3.4A Plastic Housing, LED Light Power indicator
Dimension: 50.5*29.8*20.6mm
Weight: 20g



Model: CP29
Input: DC 12-24V
Output: USB 5V 2.4A Plastic Housing, LED Light Power indicator
Dimension: 50.5*29.8*20.6mm
Weight: 18g



Model: CP95H
Input: DC 12-24V
Output: USB*2 5V 2.4A each port, Total 5V/2.4A Aluminum housing +Plastic housing, LED light
Dimension: 59*26.4*23.6mm
Weight: 21g



Model: CP85
Input: DC 12-24V
Output: USB*2 5V 2.4A each port, Total 5V/3.4A Stainless Steel housing, with Glass hammer
Dimension: 56*25.4*20.3mm
Weight: 45g



Model: CP86
Input: DC 12-24V
Output: USB*2 5V 2.4A each port, Total 5V/3.4A Aluminum housing, with Glass hammer
Dimension: 56*25.4*20.3mm
Weight: 42g

Smart Product



ES-004US


- WiFi function & Timing function;
- The smart plug connects to the WiFi, allowing the phone or tablet to operate the designated smart appliance via App under networking conditions;
- Manually close the smart plug.



Specification

- **Power:** 2200W
- **Input:** AC 100-240V 50/60Hz
- **WIFI connect:** WIFI2.4GHz b/g/n(802.11n/b/g)
- **Dimension:** 54*54*28.5mm

Output:10A(MAX) 2200W

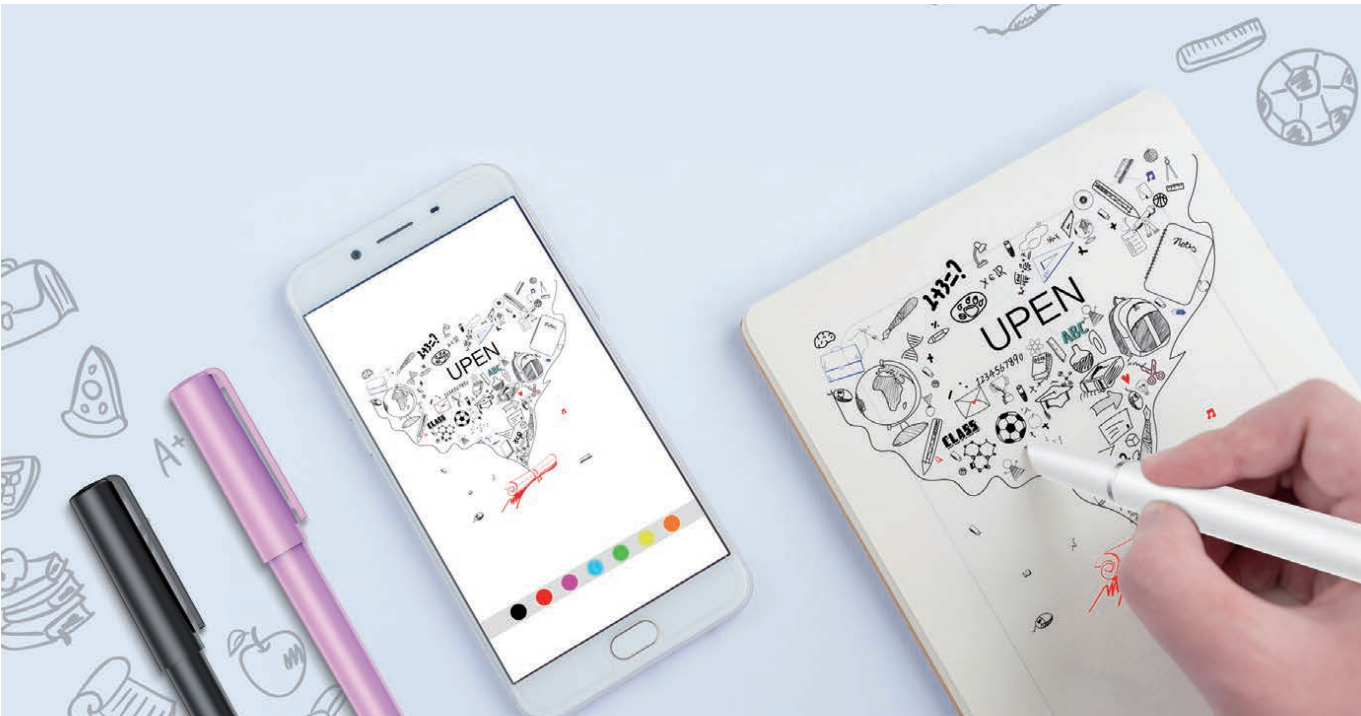

Smart Pen

Model: ZNB-03
Pen tip type: Standard C4-07 type
Connectivity: USB 2.0 (Micro USB) / Bluetooth 4.1
Operating System: Android 4.4 or higher / iOS 7.r higher
Required Bluetooth Connectivity: Bluetooth 4.1 or higher
Battery Requirement: Li-Polymer / 3.7 Volts
Usage time: Constant (8 hours) / Normal usage (3 days)
Full charge: 2 hours
Dimensions (LxH): 160 x 12mm (6.29" x 0.75")
Weight: 35g



Smart Pen

Model: ZNB-04
Pen tip type: Standard C4-07 type
Connectivity: USB 2.0 (Micro USB) / Bluetooth 4.1
Operating System: Android 4.4 or higher / iOS 7.r higher
Required Bluetooth Connectivity: Bluetooth 4.1 or higher
Battery Requirement: Li-Polymer / 3.7 Volts
Usage time: Constant (8 hours) / Normal usage (3 days)
Full charge: 2 hours
Dimensions (LxH): 135 x 17mm (5.32" x 0.67")
Weight: 25g

